




川源(中国)机械有限公司  
GSD (China) Co., Ltd.

# DH(V) 单级双吸离心泵

**DH(V) single-stage double suction centrifugal pump**

# DH(V) 单级双吸离心泵

## DH(V) single-stage double suction centrifugal pump

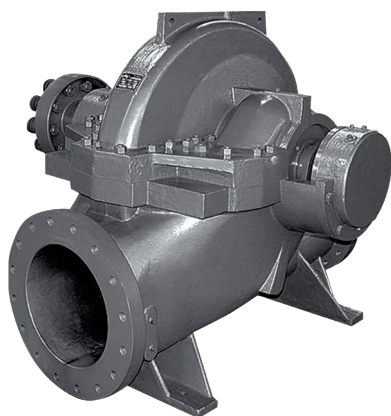

### 简介 General description

DH(V)系列单级双吸离心泵，与其它类型的泵相比寿命长、效率高、结构合理、运行成本低、安装及维修方便。

DH(V) series split case pump is of single stage, double suction centrifugal pump. Compared with other type of pumps, it features long service life, high efficiency, advanced construction, low operation cost, friendly maintenance and service.

### 用途

DH(V)型泵适用于输送不含固体颗粒及温度不超过130°C的清洁液体。

- 暖通空调冷却水循环
- 工厂、矿山、城市给排水
- 电站、水利工程
- 消防系统，船舶工业，石化行业

### Application

Type DH(V) pump can be used to delivery clear liquids and should not contain solid grain at temperature below 130°C.

- Air-condition cold water circulation.
- Water supply and discharge in factories, mines, urban areas.
- Water supply in power plants, water-conservancy projects as well as irrigation.
- Fire system, ship industry and chemical & oil industry.

### 型号说明 Type description

DH(V) - 150 - 259 - 71 - O

"O"表示原型，即叶轮外径未经过切割，没有标注"O"表示原型叶轮经过切割

"O" means impeller not been trimmed, not marked means the original impeller has been trimmed

额定扬程  
Rated head (m)

额定流量  
Rated capacity (m³/h)

出口直径  
Outlet diameter (mm)

DH单级双吸卧式离心泵  
Single-stage, double-suction horizontal centrifugal pump

DV单级双吸立式离心泵

Single-stage, double-suction vertical centrifugal pump

## 主要零件材料表 Materials of main parts

| No. | 零件名称 Parts name         | 材质 Material |                         |                 |
|-----|-------------------------|-------------|-------------------------|-----------------|
|     |                         | I           | II                      | III             |
| 1   | 泵壳 Casing               | HT250       | QT400-18                | ZG230-450       |
| 2   | 轴 Shaft                 | 45          | 30Cr13                  | 30Cr13          |
| 3   | 叶轮 Impeller             | HT250       | ZCuSn10Zn2 ZCuZn16Si4   | ZG03Cr19Ni11Mo2 |
| 4   | 轴套 Sealing shaft sleeve | 45          | 30Cr13                  | 022Cr17Ni12Mo2  |
| 5   | 泵体密封环 Case sealing ring | HT250       | ZCuSn5Pb5Zn5 ZCuSn10Zn2 | ZG03Cr19Ni11Mo2 |

可以根据用户要求选用其他材料 Other materials can be chosen by orders.

## 结构说明

DH(V)系列泵为单级双吸轴向中开蜗壳式离心泵，可以卧式或立式安装，卧式泵的电机可以根据需要放在泵的右端或左端。泵的吸入口和排出口均在泵轴线下方呈水平方向。检修时只需打开泵盖，不用拆卸管路和电机，即可取出转子进行维修。

## Description

DH(V)series pump is of single stage, double suction, axial split case, volute centriugal pump. Horizontal installation or vertical installation. Motor of horizontal pump can be installed in the left or in the right. Suction and discharge are horizontally below the pump shaft centreline. When maintenance or service is needed, just open the pump cover and take out the rotation parts for essay service without dismantle of pipeline and motor.

## 泵体

泵体的设计压力为1.6MPa和2.5MPa。为了满足世界各国的不同标准，泵的进出口法兰可按GB、ISO、DIN、ANSI及JIS等标准选取。泵的进出口法兰均在泵体上，维修时不用拆卸系统管路只需打开泵盖，即可取出转子进行维修。部分高扬程泵采用双蜗壳设计，以减小径向力，从而延长机封和轴承的使用寿命。

## Pump casing

The design pressure of pump casing is 1.6 Mpa & 2.5Mpa. In order to meet with different flange standard, suction and discharge flanges can be in conformity with GB, ISO, DIN, ANSI and JIS. Suction & discharge are all set in the casing, so it is easy to maintenance the pump; just open the pump cover, and take out the rotation parts for service without dismantle of pipeline.

## 泵盖

采用加厚法兰，用较长预紧螺栓与泵体连接，中开面无泄漏。泵盖可以自动校正，便于安装维修。

## Pump cover

Thicker flange of pump cover is fastened with pump casing by long bolts with advantages of no leakage. It is very convenient to conduct installation and maintenance work owing to the autocorrelation function of the pump cover.



## 叶轮

优秀水力设计软件设计的高效率双吸叶轮，叶轮进口面积大，进口无涡流，运转平稳，损耗低，噪声低，泵体和叶轮均可配密封环，延长叶轮的使用寿命。对叶轮进行动平衡，确保泵运行平稳，无振动。

## 轴

泵轴完全密封，不接触介质，无腐蚀，使用寿命长；轴径较粗，轴承间距离较短，无振动，从而增加轴的刚度，延长机械密封和轴承的使用寿命；转子部件装配时无需调整，应用碟形弹簧预应力装配，转子部件拆装方便。

## 轴承体

轴承体设有冷却腔，可以满足输送 $\leq 130^{\circ}\text{C}$ 的介质；卧式泵驱动端采用双列深沟球轴承，立式泵驱动端采用双列角接触轴承，承受泵的残余轴向力，保证泵运行平稳；采用油脂润滑，也可以采用封闭式的轴承，轴承设计寿命在10万小时以上。

## 轴封

采用软填料密封或机械密封(非平衡型)，机封不受旋转方向限制。

## Impeller

High-efficiency double suction impeller, stable operation, low energy cost, low noise, less vibration, and long service life. The pump casing and the impeller may be equipped with sealing rings so as to extend the service life of the impeller. Keep the impeller in dynamic balance to ensure stable vibration-free operation of the pump.

## Shaft

The pump shaft is totally sealed, no contact with the pumping liquid. it features long service life and no corrosion. As its shaft diameter is large and the distance between bearings small, and there is no vibration in its operation, the rigidity of the shaft is increased, thus extending the service life of the mechanical seal and the bearing. When assembling the rotor components, no adjustment needs to be made; and it is very convenient to disassemble and assemble the rotor components with the prestressing force of the dish spring.

## Bearing unit



There is cooling chamber in the bearing unit to ensure Max. pumping temperature  $130^{\circ}\text{C}$ . The driving end of horizontal pump adopting double zanjon ball bearing, the driving end of vertical pump adopting double row angular contact ball bearings to bear remains of axial impact. Bearings are lubricated by grease. Totally-sealed bearing is an alternative option. the service life of bearings are over 100,000 hours.

## Shaft seal

Soft packing seal or mechanical seal (non-balance type). No rotation direction limit of mechanical seal.



# 型谱图 Performance chart

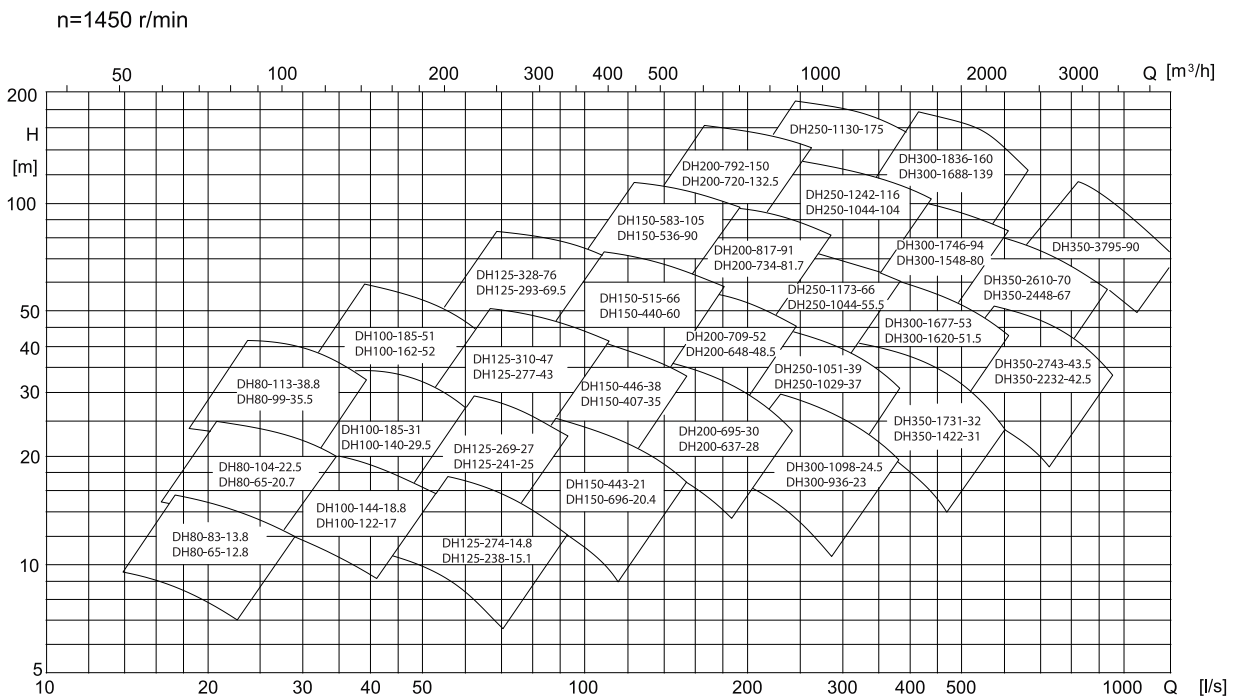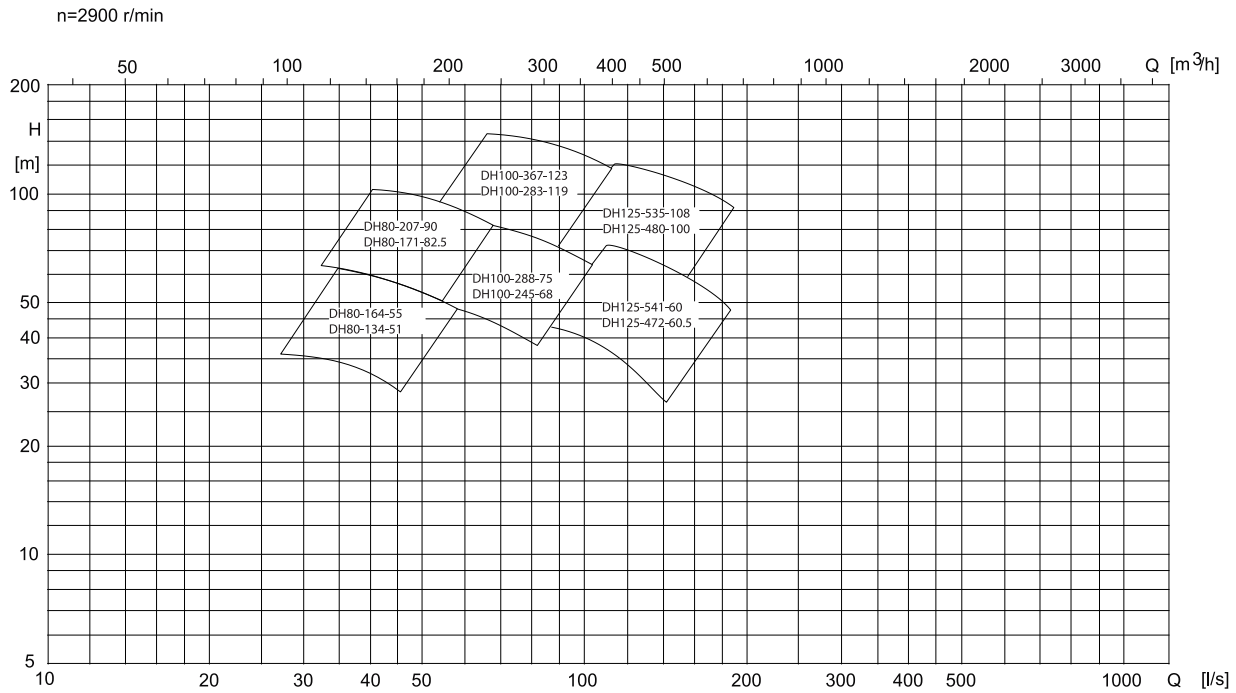


注:可根据要求设计及提供超出标准性能范围的产品。

Other performance pumps can be designed by orders.




# 型谱图 Performance chart

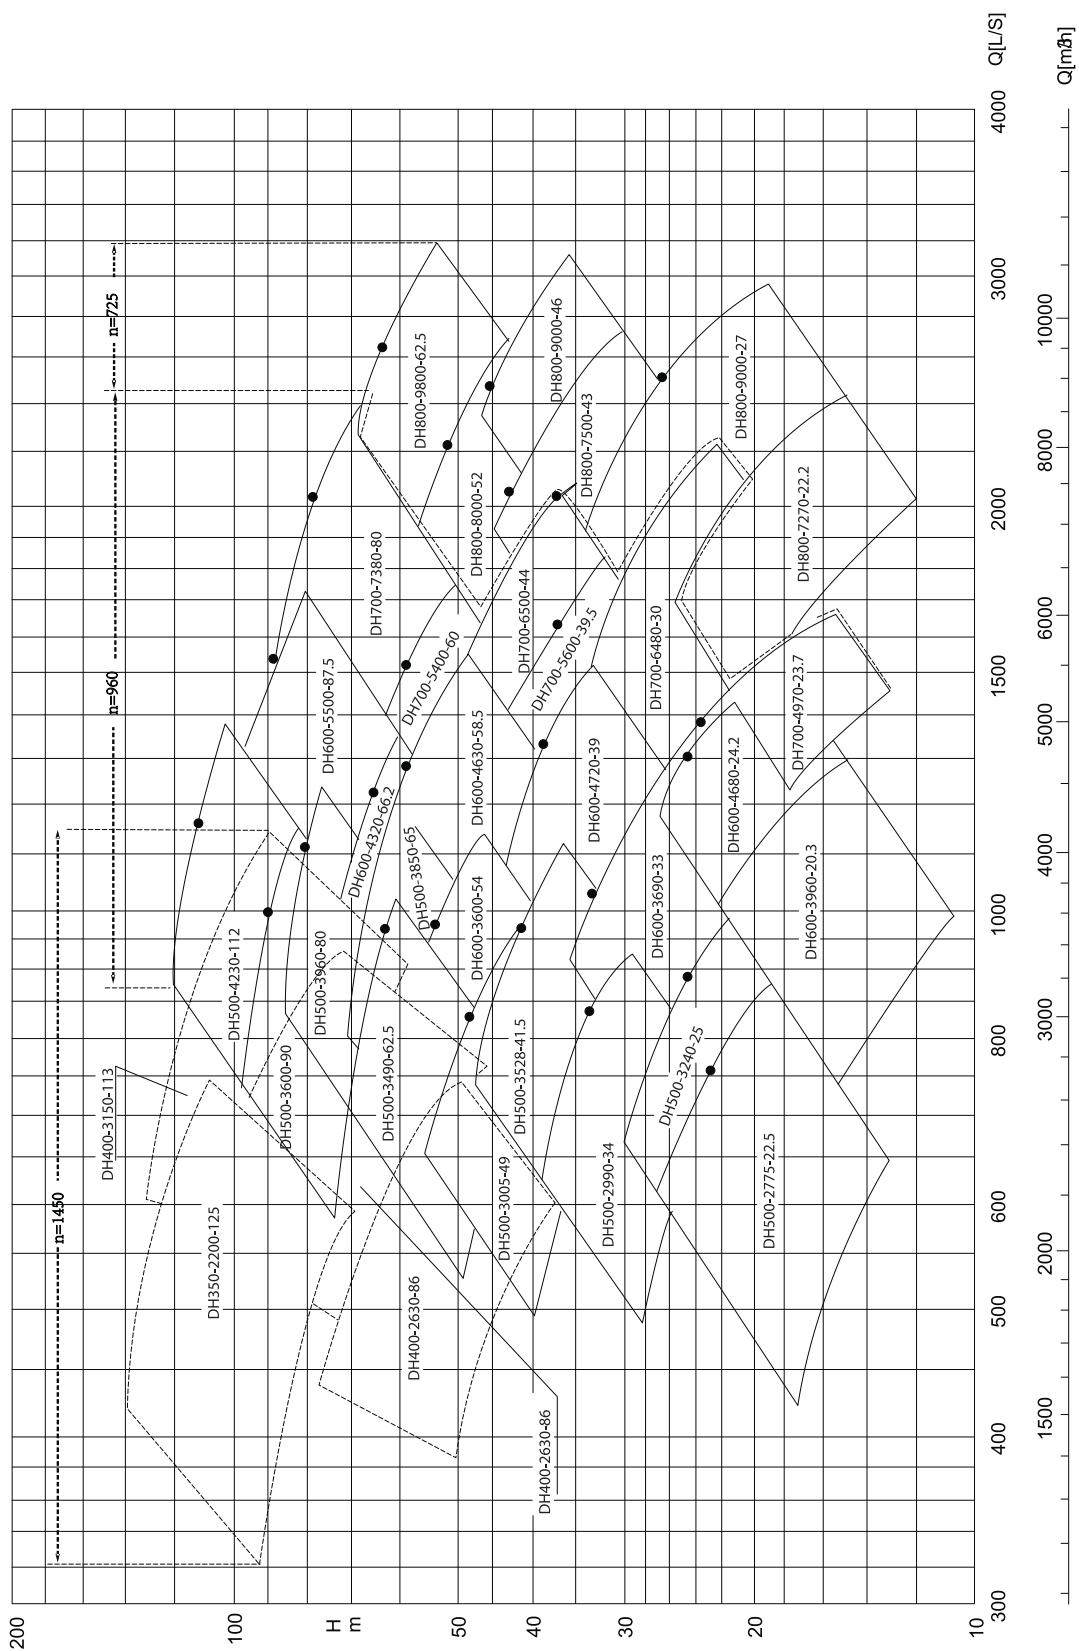




结构简图 Construction

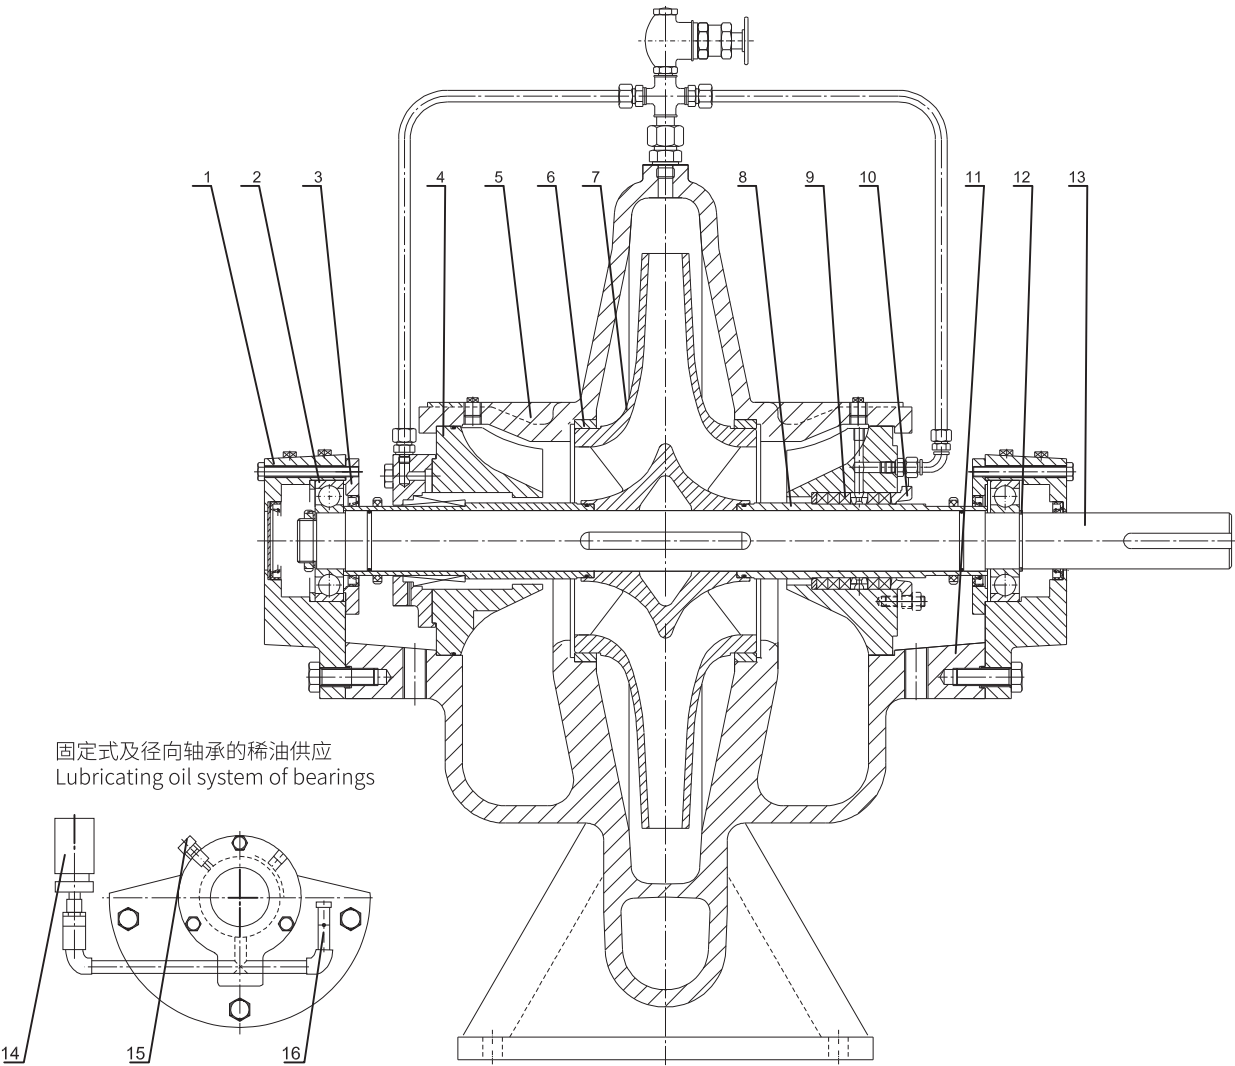

DH型卧式泵结构图

| 序号<br>No. | 零件名称<br>Parts name    | 序号<br>No. | 零件名称<br>Parts name           | 序号<br>No. | 零件名称<br>Parts name                    | 序号<br>No. | 零件名称<br>Parts name  |
|-----------|-----------------------|-----------|------------------------------|-----------|---------------------------------------|-----------|---------------------|
| 1         | 轴承体<br>bearing body   | 5         | 泵盖<br>pump cover             | 9         | 填料或机械密封<br>packing or mechanical seal | 13        | 轴<br>shaft          |
| 2         | 轴承<br>bearing         | 6         | 壳体密封环<br>case sealing ring   | 10        | 密封压盖<br>sealing cover                 | 14        | 油位计<br>oil location |
| 3         | 轴承压盖<br>bearing cover | 7         | 叶轮<br>impeller               | 11        | 泵体<br>pump casing                     | 15        | 放气塞<br>air vent     |
| 4         | 密封体<br>sealing body   | 8         | 密封轴套<br>sealing shaft sleeve | 12        | 弹性挡圈<br>block ring                    | 16        | 示油器<br>oil mark     |

## 结构简图 Construction

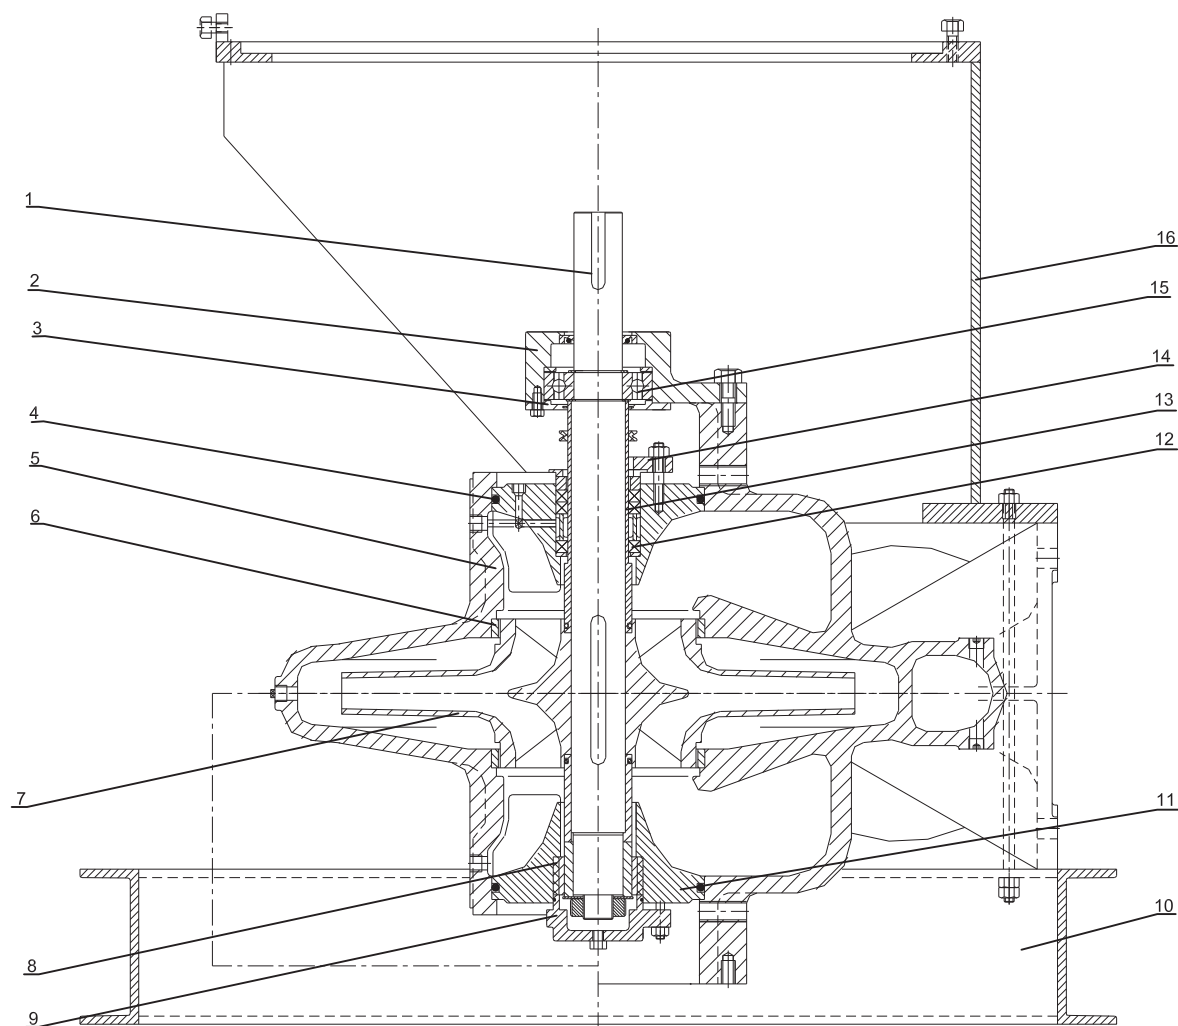


DV型立式泵结构图(DV80~DV350)


| 序号<br>No. | 零件名称<br>Parts name    | 序号<br>No. | 零件名称<br>Parts name         | 序号<br>No. | 零件名称<br>Parts name                    | 序号<br>No. | 零件名称<br>Parts name           |
|-----------|-----------------------|-----------|----------------------------|-----------|---------------------------------------|-----------|------------------------------|
| 1         | 轴<br>shaft            | 5         | 壳盖<br>casing               | 9         | 导轴承压盖<br>guild bearing cover          | 13        | 密封轴套<br>sealing shaft sleeve |
| 2         | 轴承体<br>bearing body   | 6         | 壳体密封环<br>case sealing ring | 10        | 底座<br>baseplate                       | 14        | 密封压盖<br>sealing cover        |
| 3         | 轴承压盖<br>bearing cover | 7         | 叶轮<br>impeller             | 11        | 密封体<br>sealing body                   | 15        | 轴承<br>bearing                |
| 4         | 密封圈<br>sealing ring   | 8         | 导轴承<br>guild bearing       | 12        | 填料或机械密封<br>packing or mechanical seal | 16        | 电机座<br>motor plate           |



## 安装方式 Installation type

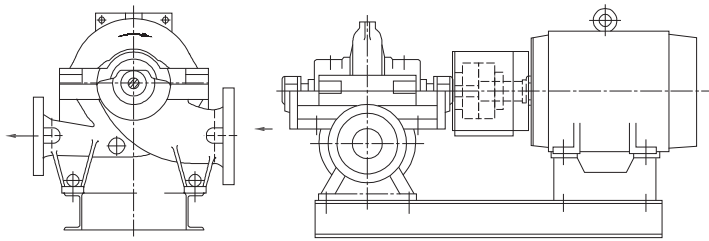


卧式 Horizontal

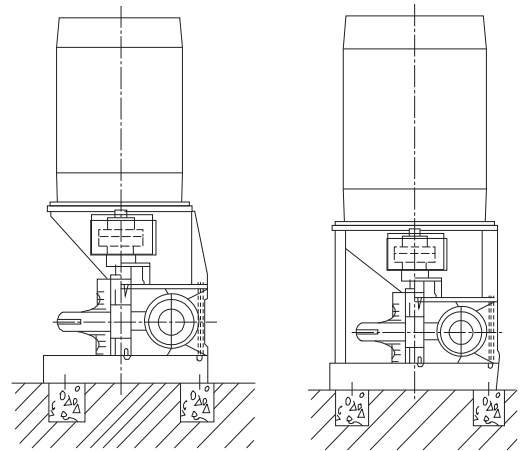


立式 Vertical

## 转密封水管路布置 Pipe system for sealing water


填料密封冲洗水管路  
flushing system for  
packing




机械密封冲洗水管路  
flushing system for  
mechanical seal



填料密封及导轴承的冲洗水管路  
flushing system for packing and  
guide bearing




机械密封及导轴承的冲洗水管路  
flushing system for mechanical  
seal and guide bearing




## 转动方向/流动方向 Rotation direction/flow direction


从传动端看  
逆时针方向旋转  
Counter clockwise  
Viewed from the  
driving side




从传动端看  
顺时针方向旋转  
Clockwise  
Viewed from the  
driving side



从传动端看  
逆时针方向旋转  
Counter clockwise  
Viewed from the  
driving side



从传动端看  
顺时针方向旋转  
Clockwise  
Viewed from the  
driving side



# 性能参数 Performance parameters

(2P)

| 型号<br>Type         | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|--------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                    |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)80-164-55-O   | 131                    | 60.5              | 2900                   | 26.8                       | 37                          | 80.6              | 5.1                        |
|                    | 164                    | 55                |                        | 29.9                       |                             | 82                |                            |
|                    | 197                    | 50                |                        | 33.4                       |                             | 80.2              |                            |
| DH(V)80-151-47.5   | 121                    | 52                | 2900                   | 21.6                       | 30                          | 79.3              | 4.6                        |
|                    | 151                    | 47.5              |                        | 24.1                       |                             | 81                |                            |
|                    | 181                    | 42.2              |                        | 26.1                       |                             | 80                |                            |
| DH(V)80-144-39     | 115                    | 44                | 2900                   | 17.8                       | 30                          | 77.8              | 4.5                        |
|                    | 144                    | 39                |                        | 19                         |                             | 80.5              |                            |
|                    | 173                    | 35                |                        | 21.1                       |                             | 78                |                            |
| DH(V)80-137-33.5   | 110                    | 37                | 2900                   | 14.7                       | 18.5                        | 75.3              | 4.3                        |
|                    | 137                    | 33.5              |                        | 16                         |                             | 77.8              |                            |
|                    | 164                    | 27.7              |                        | 16.7                       |                             | 74                |                            |
| DH(V)80-134-51-O   | 107                    | 55.5              | 2900                   | 20.5                       | 30                          | 79                | 4                          |
|                    | 134                    | 51                |                        | 22.9                       |                             | 81                |                            |
|                    | 160                    | 46                |                        | 25.1                       |                             | 80.1              |                            |
| DH(V)80-133-43.5   | 106                    | 47.7              | 2900                   | 17.6                       | 22                          | 78.2              | 4                          |
|                    | 133                    | 43.5              |                        | 19.3                       |                             | 80                |                            |
|                    | 159                    | 37                |                        | 20                         |                             | 80.1              |                            |
| DH(V)80-124-36     | 100                    | 40                | 2900                   | 14.4                       | 18.5                        | 75.5              | 3.7                        |
|                    | 124                    | 36                |                        | 15.6                       |                             | 78.2              |                            |
|                    | 149                    | 30                |                        | 16.5                       |                             | 74                |                            |
| DH(V)80-133-31     | 91                     | 35                | 2900                   | 12.1                       | 15                          | 71.5              | 3.5                        |
|                    | 133                    | 31                |                        | 12.9                       |                             | 74                |                            |
|                    | 136                    | 27                |                        | 13.9                       |                             | 72                |                            |
| DH(V)80-207-90-O   | 166                    | 97.5              | 2900                   | 57                         | 75                          | 77.2              | 7                          |
|                    | 207                    | 90                |                        | 64.6                       |                             | 78.5              |                            |
|                    | 248                    | 79                |                        | 70.8                       |                             | 75.5              |                            |
| DH(V)80-194-77     | 156                    | 83.5              | 2900                   | 46.6                       | 75                          | 76                | 6                          |
|                    | 194                    | 77                |                        | 52.6                       |                             | 77.5              |                            |
|                    | 233                    | 69                |                        | 58.1                       |                             | 75.5              |                            |
| DH(V)80-184-63.5   | 147                    | 70                | 2900                   | 37.5                       | 55                          | 74.7              | 5.3                        |
|                    | 184                    | 63.5              |                        | 41.8                       |                             | 76                |                            |
|                    | 220                    | 55                |                        | 44.6                       |                             | 74                |                            |
| DH(V)80-173-50     | 138                    | 56.5              | 2900                   | 28.7                       | 37                          | 74.2              | 5                          |
|                    | 173                    | 50                |                        | 31.4                       |                             | 75                |                            |
|                    | 198                    | 45                |                        | 32.8                       |                             | 74                |                            |
| DH(V)80-171-82.5-O | 137                    | 91                | 2900                   | 44.6                       | 55                          | 76.1              | 7.3                        |
|                    | 171                    | 82.5              |                        | 49.9                       |                             | 77                |                            |
|                    | 205                    | 72.5              |                        | 54.1                       |                             | 75                |                            |
| DH(V)80-153-71.5   | 122                    | 79.5              | 2900                   | 35.6                       | 55                          | 74.4              | 6                          |
|                    | 153                    | 71.5              |                        | 39.1                       |                             | 76.2              |                            |
|                    | 184                    | 67                |                        | 44.7                       |                             | 76                |                            |
| DH(V)80-144-60     | 115                    | 66.8              | 2900                   | 28.5                       | 37                          | 73.7              | 5.5                        |
|                    | 144                    | 60                |                        | 31.3                       |                             | 75.2              |                            |
|                    | 173                    | 53                |                        | 33.7                       |                             | 74.2              |                            |
| DH(V)80-137-49     | 110                    | 54.5              | 2900                   | 22.4                       | 30                          | 72.5              | 5.4                        |
|                    | 137                    | 49                |                        | 24.5                       |                             | 74.4              |                            |
|                    | 164                    | 42                |                        | 25.9                       |                             | 72.5              |                            |
| DH(V)100-288-75-O  | 230                    | 83                | 2900                   | 64.2                       | 90                          | 80.7              | 9                          |
|                    | 288                    | 75                |                        | 70.9                       |                             | 83                |                            |
|                    | 346                    | 67                |                        | 78.4                       |                             | 80.5              |                            |
| DH(V)100-274-63    | 219                    | 69                | 2900                   | 51.9                       | 75                          | 79.3              | 9.5                        |
|                    | 274                    | 63                |                        | 58.3                       |                             | 80.5              |                            |
|                    | 328                    | 55                |                        | 62.3                       |                             | 79                |                            |
| DH(V)100-261-52    | 209                    | 59                | 2900                   | 43.5                       | 55                          | 77.2              | 9.7                        |
|                    | 261                    | 52                |                        | 46.8                       |                             | 79                |                            |
|                    | 313                    | 46.5              |                        | 51.5                       |                             | 77                |                            |
| DH(V)100-240-45    | 193                    | 49                | 2900                   | 33.9                       | 45                          | 76                | 9.7                        |
|                    | 240                    | 45                |                        | 37.7                       |                             | 78                |                            |
|                    | 290                    | 37                |                        | 39.2                       |                             | 74.5              |                            |
| DH(V)100-245-68-O  | 196                    | 75                | 2900                   | 50                         | 75                          | 80                | 8.6                        |
|                    | 245                    | 68                |                        | 55.6                       |                             | 81.5              |                            |
|                    | 294                    | 59                |                        | 59.8                       |                             | 79                |                            |
| DH(V)100-223-59    | 180                    | 65                | 2900                   | 40.6                       | 55                          | 78                | 7.8                        |
|                    | 223                    | 59                |                        | 44.7                       |                             | 79.5              |                            |
|                    | 268                    | 51                |                        | 47.9                       |                             | 77                |                            |
| DH(V)100-205-51    | 165                    | 56                | 2900                   | 32.9                       | 45                          | 76.5              | 7.4                        |
|                    | 205                    | 51                |                        | 36.8                       |                             | 77.5              |                            |
|                    | 246                    | 44                |                        | 38.8                       |                             | 76                |                            |



## 性能参数 Performance parameters

(2P)

| 型号<br>Type          | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|---------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                     |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)100-190-43     | 150                    | 48                | 2900                   | 26.4                       | 37                          | 75                | 7.1                        |
|                     | 190                    | 43                |                        | 29.1                       |                             | 76                |                            |
|                     | 227                    | 38                |                        | 31.1                       |                             | 75.5              |                            |
| DH(V)100-367-123-O  | 294                    | 135               | 2900                   | 137.7                      | 185                         | 78.5              | 13.7                       |
|                     | 367                    | 123               |                        | 153.8                      |                             | 80                |                            |
|                     | 440                    | 105               |                        | 164                        |                             | 76.8              |                            |
| DH(V)100-335-106    | 268                    | 116               | 2900                   | 108                        | 132                         | 78.3              | 12.2                       |
|                     | 335                    | 106               |                        | 121.4                      | 160                         | 79.6              |                            |
|                     | 402                    | 92                |                        | 131                        |                             | 77                |                            |
| DH(V)100-302-90     | 242                    | 98                | 2900                   | 82.7                       | 110                         | 78.1              | 10.7                       |
|                     | 302                    | 90                |                        | 93.5                       |                             | 79.3              |                            |
|                     | 363                    | 80                |                        | 102.5                      |                             | 77.2              |                            |
| DH(V)100-227-74     | 182                    | 82                | 2900                   | 52.8                       | 90                          | 77                | 9.2                        |
|                     | 227                    | 74                |                        | 70.7                       |                             | 78.3              |                            |
|                     | 333                    | 65.5              |                        | 78.1                       |                             | 76                |                            |
| DH(V)100-283-119-O  | 226                    | 130               | 2900                   | 105                        | 132                         | 76.5              | 10.2                       |
|                     | 283                    | 119               |                        | 117.4                      |                             | 78                |                            |
|                     | 340                    | 105               |                        | 128.5                      |                             | 75.5              |                            |
| DH(V)100-260-103    | 208                    | 111               | 2900                   | 81.8                       | 110                         | 76.3              | 9.5                        |
|                     | 260                    | 103               |                        | 93.7                       |                             | 77.6              |                            |
|                     | 310                    | 90                |                        | 100                        |                             | 76                |                            |
| DH(V)100-250-84     | 200                    | 92                | 2900                   | 65.8                       | 90                          | 76.1              | 9                          |
|                     | 250                    | 84                |                        | 73.8                       |                             | 77.3              |                            |
|                     | 300                    | 74                |                        | 80.5                       |                             | 75                |                            |
| DH(V)100-234-69     | 187                    | 78                | 2900                   | 53.1                       | 75                          | 75                | 8.5                        |
|                     | 234                    | 69                |                        | 57.1                       |                             | 77                |                            |
|                     | 281                    | 60                |                        | 61.2                       |                             | 75                |                            |
| DH(V)125-541-60-O   | 426                    | 68                | 2900                   | 93.8                       | 110                         | 84.2              | 9.9                        |
|                     | 541                    | 60                |                        | 101.8                      |                             | 85.5              |                            |
|                     | 639                    | 48                |                        | 101.9                      |                             | 82                |                            |
| DH(V)125-490-52     | 392                    | 60                | 2900                   | 78.1                       | 90                          | 82                | 10.1                       |
|                     | 490                    | 52                |                        | 82.4                       |                             | 84                |                            |
|                     | 585                    | 43.5              |                        | 84.4                       |                             | 82.5              |                            |
| DH(V)125-454-43.5   | 363                    | 50                | 2900                   | 63.4                       | 75                          | 78                | 10.3                       |
|                     | 454                    | 43.5              |                        | 65.1                       |                             | 82                |                            |
|                     | 544                    | 35                |                        | 66.6                       |                             | 78                |                            |
| DH(V)125-425-34     | 340                    | 40                | 2900                   | 49.4                       | 55                          | 75                | 10.7                       |
|                     | 425                    | 34                |                        | 50.8                       |                             | 77                |                            |
|                     | 489                    | 30                |                        | 52.5                       |                             | 76                |                            |
| DH(V)125-472-60.5-O | 377                    | 68                | 2900                   | 84.2                       | 110                         | 83                | 12.1                       |
|                     | 472                    | 60.5              |                        | 92                         |                             | 84.5              |                            |
|                     | 566                    | 55                |                        | 101.5                      |                             | 83.6              |                            |
| DH(V)125-436-53     | 349                    | 60                | 2900                   | 70.3                       | 90                          | 81                | 11.8                       |
|                     | 436                    | 53                |                        | 74.8                       |                             | 84                |                            |
|                     | 523                    | 44                |                        | 77.2                       |                             | 81.2              |                            |
| DH(V)125-410-45     | 328                    | 52                | 2900                   | 60.1                       | 75                          | 77.5              | 11.9                       |
|                     | 410                    | 45                |                        | 61.3                       |                             | 82                |                            |
|                     | 493                    | 37                |                        | 63.3                       |                             | 78.4              |                            |
| DH(V)125-382-37     | 305                    | 42.5              | 2900                   | 47.1                       | 55                          | 75                | 12                         |
|                     | 382                    | 37                |                        | 49.9                       |                             | 77                |                            |
|                     | 458                    | 30                |                        | 49.9                       |                             | 75                |                            |
| DH(V)125-535-108-O  | 428                    | 117               | 2900                   | 166                        | 200                         | 82                | 10.9                       |
|                     | 535                    | 108               |                        | 187                        |                             | 84                |                            |
|                     | 640                    | 94                |                        | 197                        |                             | 83                |                            |
| DH(V)125-497-88     | 397                    | 97                | 2900                   | 131                        | 160                         | 80                | 10.7                       |
|                     | 497                    | 88                |                        | 145                        |                             | 82                |                            |
|                     | 596                    | 75                |                        | 153                        |                             | 79.5              |                            |
| DH(V)125-454-72     | 363                    | 80                | 2900                   | 101                        | 132                         | 78.3              | 10.5                       |
|                     | 454                    | 72                |                        | 111                        |                             | 80                |                            |
|                     | 544                    | 62                |                        | 117                        |                             | 78.8              |                            |
| DH(V)125-403-57     | 323                    | 65                | 2900                   | 74.7                       | 90                          | 76.5              | 10.4                       |
|                     | 403                    | 57                |                        | 80.2                       |                             | 78                |                            |
|                     | 484                    | 47                |                        | 80.5                       |                             | 77                |                            |
| DH(V)125-480-100-O  | 383                    | 113               | 2900                   | 145                        | 185                         | 81.6              | 10.9                       |
|                     | 480                    | 100               |                        | 157                        |                             | 83                |                            |
|                     | 575                    | 85.5              |                        | 166                        |                             | 80.5              |                            |
| DH(V)125-436-83.5   | 348                    | 93.5              | 2900                   | 112                        | 132                         | 79.5              | 10.5                       |
|                     | 436                    | 83.5              |                        | 121                        |                             | 82                |                            |
|                     | 523                    | 70                |                        | 126                        |                             | 79                |                            |



# 性能参数 Performance parameters

(2P)

| 型号<br>Type         | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|--------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                    |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)125-385-70    | 308                    | 78                | 2900                   | 84.5                       | 110                         | 77.5              | 10.1                       |
|                    | 385                    | 70                |                        | 93                         |                             | 79                |                            |
|                    | 462                    | 60                |                        | 96.9                       |                             | 78                |                            |
| DH(V)125-342-55    | 274                    | 69                | 2900                   | 59.6                       | 75                          | 75                | 10                         |
|                    | 342                    | 55                |                        | 67.4                       |                             | 76                |                            |
|                    | 410                    | 47                |                        | 70                         |                             | 75                |                            |
| DH(V)80-83-13.8-O  | 66                     | 15                | 1450                   | 3.4                        | 5.5                         | 80.5              | 2.1                        |
|                    | 83                     | 13.8              |                        | 3.8                        |                             | 82                |                            |
|                    | 100                    | 12.2              |                        | 4.2                        |                             | 79.5              |                            |
| DH(V)80-76-11.8    | 61                     | 13                | 1450                   | 2.7                        | 4                           | 79                | 2.1                        |
|                    | 76                     | 11.8              |                        | 3                          |                             | 81                |                            |
|                    | 90                     | 10.5              |                        | 3.3                        |                             | 79.7              |                            |
| DH(V)80-72-9.8     | 58                     | 11                | 1450                   | 2.2                        | 3                           | 78                | 2.1                        |
|                    | 72                     | 9.8               |                        | 2.4                        |                             | 80.5              |                            |
|                    | 87                     | 8.7               |                        | 2.6                        |                             | 78                |                            |
| DH(V)80-69-8.2     | 55                     | 9.1               | 1450                   | 1.8                        | 3                           | 76                | 2.1                        |
|                    | 69                     | 8.2               |                        | 2                          |                             | 78                |                            |
|                    | 83                     | 7                 |                        | 2.1                        |                             | 75                |                            |
| DH(V)80-65-12.8-O  | 52                     | 14.2              | 1450                   | 2.6                        | 4                           | 78                | 2.1                        |
|                    | 65                     | 12.8              |                        | 2.8                        |                             | 81                |                            |
|                    | 78                     | 10                |                        | 3.1                        |                             | 80.2              |                            |
| DH(V)80-64-11.8    | 52                     | 12                | 1450                   | 2.1                        | 4                           | 78.5              | 2.1                        |
|                    | 64                     | 11.8              |                        | 1.6                        |                             | 80                |                            |
|                    | 77                     | 11.7              |                        | 3.1                        |                             | 78                |                            |
| DH(V)80-61-9       | 50                     | 10                | 1450                   | 1.8                        | 3                           | 76                | 2.1                        |
|                    | 61                     | 9                 |                        | 1.9                        |                             | 78                |                            |
|                    | 73                     | 7.8               |                        | 2                          |                             | 76.2              |                            |
| DH(V)80-58-7.6     | 47                     | 8.7               | 1450                   | 1.5                        | 2.2                         | 70                | 2.1                        |
|                    | 58                     | 7.6               |                        | 1.6                        |                             | 74                |                            |
|                    | 70                     | 6.5               |                        | 1.8                        |                             | 71                |                            |
| DH(V)80-104-22.5-O | 83                     | 24                | 1450                   | 7                          | 11                          | 77.5              | 2.8                        |
|                    | 104                    | 22.5              |                        | 8.1                        |                             | 78.5              |                            |
|                    | 125                    | 19.5              |                        | 8.8                        |                             | 75                |                            |
| DH(V)80-99-19      | 80                     | 21.3              | 1450                   | 6.1                        | 11                          | 75                | 2.7                        |
|                    | 99                     | 19                |                        | 6.6                        |                             | 78                |                            |
|                    | 120                    | 17                |                        | 7.4                        |                             | 74.5              |                            |
| DH(V)80-90-16      | 72                     | 17.5              | 1450                   | 4.6                        | 7.5                         | 74.5              | 2.5                        |
|                    | 90                     | 16                |                        | 5.2                        |                             | 76                |                            |
|                    | 108                    | 13.7              |                        | 5.4                        |                             | 74                |                            |
| DH(V)80-84-13      | 67                     | 13.8              | 1450                   | 3.4                        | 5.5                         | 74                | 2.5                        |
|                    | 84                     | 13                |                        | 4                          |                             | 75                |                            |
|                    | 100                    | 11.5              |                        | 4.3                        |                             | 73.2              |                            |
| DH(V)80-65-20.7    | 68                     | 23.1              | 1450                   | 5.7                        | 7.5                         | 75.8              | 2.4                        |
|                    | 65                     | 20.7              |                        | 6.2                        |                             | 77                |                            |
|                    | 102                    | 18.2              |                        | 6.7                        |                             | 75.4              |                            |
| DH(V)80-77-18.1    | 61                     | 20                | 1450                   | 4.5                        | 7.5                         | 74.5              | 2.2                        |
|                    | 77                     | 18.1              |                        | 5                          |                             | 76                |                            |
|                    | 92                     | 16                |                        | 5.3                        |                             | 75                |                            |
| DH(V)80-72-15      | 58                     | 16.5              | 1450                   | 3.5                        | 5.5                         | 73                | 2.1                        |
|                    | 72                     | 15                |                        | 3.9                        |                             | 75                |                            |
|                    | 86                     | 13.2              |                        | 4.2                        |                             | 74                |                            |
| DH(V)80-67-12.5    | 53                     | 13.8              | 1450                   | 2.7                        | 4                           | 72                | 2.1                        |
|                    | 67                     | 12.5              |                        | 3.1                        |                             | 74                |                            |
|                    | 80                     | 10.8              |                        | 3.2                        |                             | 73                |                            |
| DH(V)80-113-38.8-O | 90                     | 41                | 1450                   | 13.8                       | 18.5                        | 73                | 2.8                        |
|                    | 113                    | 38.8              |                        | 16.2                       |                             | 75                |                            |
|                    | 136                    | 33.5              |                        | 17.3                       |                             | 71.8              |                            |
| DH(V)80-99-33      | 80                     | 35                | 1450                   | 10.6                       | 15                          | 71                | 2.3                        |
|                    | 99                     | 33                |                        | 12.3                       |                             | 72.2              |                            |
|                    | 120                    | 29.1              |                        | 13.3                       |                             | 71                |                            |
| DH(V)80-88-27.5    | 70                     | 29.3              | 1450                   | 8.2                        | 11                          | 38.4              | 2.3                        |
|                    | 88                     | 27.5              |                        | 9.4                        |                             | 70                |                            |
|                    | 106                    | 24.7              |                        | 10.2                       |                             | 68.3              |                            |
| DH(V)80-81-22.5    | 65                     | 23.8              | 1450                   | 6.4                        | 11                          | 66                | 2.3                        |
|                    | 81                     | 22.5              |                        | 7.4                        |                             | 67.5              |                            |
|                    | 98                     | 20                |                        | 8                          |                             | 65.5              |                            |
| DH(V)80-99-35.5-O  | 80                     | 38.8              | 1450                   | 11.8                       | 18.5                        | 71                | 3                          |
|                    | 99                     | 35.5              |                        | 13.1                       |                             | 73                |                            |
|                    | 120                    | 31.1              |                        | 14.3                       |                             | 71                |                            |

## 性能参数 Performance parameters

| 型号<br>Type          | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|---------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                     |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)80-90-30.8     | 72                     | 34.1              | 1450                   | 9.7                        | 15                          | 69                | 2.6                        |
|                     | 90                     | 30.8              |                        | 10.8                       |                             | 70                |                            |
|                     | 108                    | 26.3              |                        | 11.4                       |                             | 68                |                            |
| DH(V)80-76-25.5     | 60                     | 27.5              | 1450                   | 7                          | 11                          | 64.5              | 2.3                        |
|                     | 76                     | 25.5              |                        | 8                          |                             | 66                |                            |
|                     | 90                     | 22.5              |                        | 8.5                        |                             | 65.2              |                            |
| DH(V)80-67-20       | 53                     | 21.3              | 1450                   | 4.9                        | 7.5                         | 63                | 2.3                        |
|                     | 67                     | 20                |                        | 5.7                        |                             | 64                |                            |
|                     | 80                     | 17.5              |                        | 6                          |                             | 63                |                            |
| DH(V)100-144-18.8-O | 115                    | 21.2              | 1450                   | 8.2                        | 11                          | 80.7              | 2.9                        |
|                     | 144                    | 18.8              |                        | 8.9                        | 15                          | 83                |                            |
|                     | 173                    | 17.5              |                        | 10                         |                             | 81.7              |                            |
| DH(V)100-140-15.8   | 112                    | 17.5              | 1450                   | 6.7                        | 11                          | 79                | 2.9                        |
|                     | 140                    | 15.8              |                        | 7.4                        |                             | 81                |                            |
|                     | 167                    | 13.2              |                        | 7.7                        |                             | 77                |                            |
| DH(V)100-126-13.5   | 100                    | 14.5              | 1450                   | 5.1                        | 7.5                         | 77.8              | 2.9                        |
|                     | 126                    | 13.5              |                        | 5.9                        |                             | 79                |                            |
|                     | 150                    | 11.9              |                        | 6.3                        |                             | 77.6              |                            |
| DH(V)100-120-11.2   | 97                     | 12.2              | 1450                   | 4.2                        | 7.5                         | 75.5              | 2.9                        |
|                     | 120                    | 11.2              |                        | 4.7                        |                             | 77.5              |                            |
|                     | 145                    | 9.5               |                        | 5                          |                             | 75.5              |                            |
| DH(V)100-122-17-O   | 98                     | 18.8              | 1450                   | 6.2                        | 11                          | 80.5              | 2.4                        |
|                     | 122                    | 17                |                        | 7                          |                             | 81.5              |                            |
|                     | 147                    | 15                |                        | 7.6                        |                             | 79.5              |                            |
| DH(V)100-112-14.5   | 90                     | 16.3              | 1450                   | 5.1                        | 7.5                         | 78                | 2.4                        |
|                     | 112                    | 14.5              |                        | 5.6                        |                             | 79.5              |                            |
|                     | 135                    | 12.7              |                        | 6                          |                             | 77.2              |                            |
| DH(V)100-106-12.5   | 85                     | 13.7              | 1450                   | 4.1                        | 7.5                         | 77                | 2.2                        |
|                     | 106                    | 12.5              |                        | 4.7                        |                             | 78                |                            |
|                     | 128                    | 11.3              |                        | 5.3                        |                             | 75                |                            |
| DH(V)100-94-11      | 75                     | 12.1              | 1450                   | 3.3                        | 5.5                         | 75                | 2.1                        |
|                     | 94                     | 11                |                        | 3.7                        |                             | 76                |                            |
|                     | 113                    | 9.6               |                        | 3.9                        |                             | 75.2              |                            |
| DH(V)100-185-31-O   | 148                    | 34                | 1450                   | 17.4                       | 22                          | 78.5              | 3.1                        |
|                     | 185                    | 31                |                        | 19.6                       | 30                          | 80                |                            |
|                     | 222                    | 26.8              |                        | 21                         |                             | 77.5              |                            |
| DH(V)100-166-27     | 133                    | 29.3              | 1450                   | 13.4                       | 18.5                        | 79                | 2.7                        |
|                     | 166                    | 27                |                        | 15.3                       |                             | 79.6              |                            |
|                     | 200                    | 24.3              |                        | 17                         |                             | 77.4              |                            |
| DH(V)100-151-22.5   | 120                    | 24.8              | 1450                   | 10.5                       | 15                          | 78                | 2.5                        |
|                     | 151                    | 22.5              |                        | 11.7                       |                             | 79.3              |                            |
|                     | 180                    | 20                |                        | 12.8                       |                             | 77.4              |                            |
| DH(V)100-140-18.5   | 112                    | 20.2              | 1450                   | 7.9                        | 11                          | 77.8              | 2.3                        |
|                     | 140                    | 18.5              |                        | 9                          |                             | 79                |                            |
|                     | 162                    | 16.2              |                        | 9.2                        |                             | 78                |                            |
| DH(V)100-140-29.5-O | 112                    | 32.5              | 1450                   | 13                         | 18.5                        | 76.6              | 2.7                        |
|                     | 140                    | 29.5              |                        | 14.1                       |                             | 78                |                            |
|                     | 168                    | 25                |                        | 15.5                       |                             | 74                |                            |
| DH(V)100-133-25.5   | 106                    | 27.5              | 1450                   | 10.4                       | 15                          | 76.6              | 2.5                        |
|                     | 133                    | 25.5              |                        | 11.6                       |                             | 77.6              |                            |
|                     | 160                    | 22                |                        | 12.8                       |                             | 75                |                            |
| DH(V)100-124-21.2   | 100                    | 23                | 1450                   | 8.2                        | 11                          | 76.2              | 2.4                        |
|                     | 124                    | 21.2              |                        | 9                          |                             | 77.3              |                            |
|                     | 150                    | 18                |                        | 9.8                        |                             | 75                |                            |
| DH(V)100-117-17     | 94                     | 19.4              | 1450                   | 6.5                        | 11                          | 76.5              | 2.3                        |
|                     | 117                    | 17                |                        | 6.9                        |                             | 77                |                            |
|                     | 140                    | 15                |                        | 7.6                        |                             | 76                |                            |
| DH(V)100-185-51-O   | 148                    | 57                | 1450                   | 31.4                       | 45                          | 73                | 3                          |
|                     | 185                    | 51                |                        | 33.5                       |                             | 76.5              |                            |
|                     | 220                    | 44                |                        | 35.6                       |                             | 74                |                            |
| DH(V)100-167-46     | 133                    | 47.3              | 1450                   | 24.5                       | 37                          | 71                | 2.7                        |
|                     | 167                    | 46                |                        | 28.3                       |                             | 74                |                            |
|                     | 200                    | 38                |                        | 29.2                       |                             | 72.3              |                            |
| DH(V)100-155-38     | 124                    | 41                | 1450                   | 20.3                       | 30                          | 67.5              | 2.5                        |
|                     | 155                    | 38                |                        | 22.6                       |                             | 71                |                            |
|                     | 186                    | 31                |                        | 23.1                       |                             | 68                |                            |
| DH(V)100-135-30.3   | 108                    | 32.5              | 1450                   | 14.4                       | 18.5                        | 66.3              | 2.1                        |
|                     | 135                    | 30.3              |                        | 14.5                       |                             | 69                |                            |
|                     | 162                    | 25.3              |                        | 16.8                       |                             | 66.5              |                            |



## 性能参数 Performance parameters

| 型号<br>Type          | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|---------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                     |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)100-162-52-O   | 130                    | 56.2              | 1450                   | 28.4                       | 37                          | 70                | 3.6                        |
|                     | 162                    | 52                |                        | 31.4                       |                             | 72                |                            |
|                     | 195                    | 45.8              |                        | 35.9                       |                             | 67.5              |                            |
| DH(V)100-142-44     | 114                    | 47.5              | 1450                   | 22.2                       | 30                          | 66.5              | 3.3                        |
|                     | 142                    | 44                |                        | 23.7                       |                             | 69                |                            |
|                     | 170                    | 39                |                        | 27.3                       |                             | 66.5              |                            |
| DH(V)100-130-37.5   | 105                    | 40                | 1450                   | 17.7                       | 30                          | 64.5              | 3                          |
|                     | 130                    | 37.5              |                        | 18.8                       |                             | 66.5              |                            |
|                     | 157                    | 32.5              |                        | 21.7                       |                             | 64                |                            |
| DH(V)100-115-28.7   | 92                     | 30.8              | 1450                   | 12.7                       | 18.5                        | 61                | 2.7                        |
|                     | 115                    | 28.7              |                        | 14.3                       |                             | 63                |                            |
|                     | 138                    | 25                |                        | 15.4                       |                             | 61.2              |                            |
| DH(V)125-274-14.8-O | 220                    | 17                | 1450                   | 12.1                       | 15                          | 84                | 2.3                        |
|                     | 274                    | 14.8              |                        | 12.9                       |                             | 85.5              |                            |
|                     | 328                    | 12                |                        | 13.1                       |                             | 82                |                            |
| DH(V)125-241-13.2   | 193                    | 15                | 1450                   | 9.7                        | 15                          | 81                | 2.3                        |
|                     | 241                    | 13.2              |                        | 10.3                       |                             | 84.5              |                            |
|                     | 290                    | 10.8              |                        | 10.4                       |                             | 82                |                            |
| DH(V)125-230-10.6   | 184                    | 12.6              | 1450                   | 8                          | 11                          | 79.4              | 2.2                        |
|                     | 230                    | 10.6              |                        | 8.1                        |                             | 82.5              |                            |
|                     | 277                    | 8                 |                        | 8.1                        |                             | 76                |                            |
| DH(V)125-209-8.7    | 167                    | 10.3              | 1450                   | 6.4                        | 7.5                         | 73                | 2.2                        |
|                     | 209                    | 8.7               |                        | 6.4                        |                             | 77.5              |                            |
|                     | 250                    | 6.8               |                        | 6.3                        |                             | 73                |                            |
| DH(V)125-238-15.1-O | 190                    | 17                | 1450                   | 10.5                       | 15                          | 84.1              | 2.7                        |
|                     | 238                    | 15.1              |                        | 11.6                       |                             | 84.5              |                            |
|                     | 307                    | 11.5              |                        | 12                         |                             | 80                |                            |
| DH(V)125-212-13.5   | 170                    | 15.2              | 1450                   | 8.6                        | 11                          | 81                | 2.7                        |
|                     | 212                    | 13.5              |                        | 9.3                        |                             | 84                |                            |
|                     | 255                    | 11.4              |                        | 9.7                        |                             | 82                |                            |
| DH(V)125-205-11.5   | 164                    | 13                | 1450                   | 7.5                        | 11                          | 78                | 2.7                        |
|                     | 205                    | 11.5              |                        | 7.8                        |                             | 82                |                            |
|                     | 246                    | 9.2               |                        | 7.9                        |                             | 78                |                            |
| DH(V)125-195-9.1    | 156                    | 10.5              | 1450                   | 5.9                        | 7.5                         | 75                | 2.7                        |
|                     | 195                    | 9.1               |                        | 6.2                        |                             | 78                |                            |
|                     | 223                    | 7.7               |                        | 6.3                        |                             | 74                |                            |
| DH(V)125-269-27-O   | 215                    | 29.2              | 1450                   | 20.8                       | 30                          | 82.3              | 2.4                        |
|                     | 269                    | 27                |                        | 23.6                       |                             | 84                |                            |
|                     | 323                    | 23.5              |                        | 25.2                       |                             | 82                |                            |
| DH(V)125-243-22     | 195                    | 24.4              | 1450                   | 16.1                       | 22                          | 80.3              | 2.4                        |
|                     | 243                    | 22                |                        | 17.8                       |                             | 82                |                            |
|                     | 292                    | 19.6              |                        | 19.8                       |                             | 80                |                            |
| DH(V)125-223-18     | 178                    | 20                | 1450                   | 12.3                       | 15                          | 79                | 2.3                        |
|                     | 223                    | 18                |                        | 13.7                       |                             | 80                |                            |
|                     | 268                    | 15.5              |                        | 14.4                       |                             | 78.3              |                            |
| DH(V)125-202-14.2   | 161                    | 16.3              | 1450                   | 9.3                        | 15                          | 77                | 2.3                        |
|                     | 202                    | 14.2              |                        | 10                         |                             | 78                |                            |
|                     | 242                    | 11.8              |                        | 10.2                       |                             | 76.2              |                            |
| DH(V)125-241-25-O   | 193                    | 27.5              | 1450                   | 17.8                       | 22                          | 81                | 2.4                        |
|                     | 241                    | 25                |                        | 19.8                       |                             | 83                |                            |
|                     | 290                    | 21.3              |                        | 20.6                       |                             | 80                |                            |
| DH(V)125-218-21     | 174                    | 23.4              | 1450                   | 13.9                       | 18.5                        | 80                | 2.3                        |
|                     | 218                    | 21                |                        | 15.2                       |                             | 82                |                            |
|                     | 261                    | 17.5              |                        | 16                         |                             | 78                |                            |
| DH(V)125-196-17.5   | 157                    | 19                | 1450                   | 10.4                       | 15                          | 78                | 2.2                        |
|                     | 196                    | 17.5              |                        | 11.8                       |                             | 79                |                            |
|                     | 235                    | 15                |                        | 12.3                       |                             | 78                |                            |
| DH(V)125-173-13.7   | 138                    | 15.1              | 1450                   | 7.7                        | 11                          | 74.3              | 2.2                        |
|                     | 173                    | 13.7              |                        | 8.5                        |                             | 76                |                            |
|                     | 207                    | 11.3              |                        | 8.6                        |                             | 74                |                            |
| DH(V)125-310-47-O   | 245                    | 50                | 1450                   | 41.2                       | 55                          | 82                | 2.6                        |
|                     | 310                    | 47                |                        | 47.2                       |                             | 84                |                            |
|                     | 360                    | 44                |                        | 52.3                       |                             | 82                |                            |
| DH(V)125-281-39     | 225                    | 41.6              | 1450                   | 31.8                       | 45                          | 80                | 2.8                        |
|                     | 281                    | 39                |                        | 36                         |                             | 83                |                            |
|                     | 337                    | 35.6              |                        | 40.4                       |                             | 81.2              |                            |
| DH(V)125-256-31.5   | 205                    | 33.7              | 1450                   | 24.2                       | 37                          | 76                | 2.9                        |
|                     | 256                    | 31.5              |                        | 26.8                       |                             | 82                |                            |
|                     | 307                    | 28.2              |                        | 29.8                       |                             | 79.5              |                            |

## 性能参数 Performance parameters

| 型号<br>Type          | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|---------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                     |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)125-230-24     | 184                    | 25.5              | 1450                   | 16.9                       | 22                          | 76                | 3                          |
|                     | 230                    | 24                |                        | 18.8                       | 30                          | 80                |                            |
|                     | 278                    | 20.9              |                        | 20.2                       |                             | 78                |                            |
| DH(V)125-277-43-O   | 222                    | 46.3              | 1450                   | 35.4                       | 55                          | 79.2              | 2.9                        |
|                     | 277                    | 43                |                        | 40.1                       |                             | 81                |                            |
|                     | 333                    | 38.8              |                        | 44                         |                             | 80                |                            |
| DH(V)125-252-37     | 202                    | 39.8              | 1450                   | 28                         | 37                          | 78.5              | 2.8                        |
|                     | 252                    | 37                |                        | 31.8                       |                             | 80                |                            |
|                     | 302                    | 32.8              |                        | 34.2                       |                             | 79                |                            |
| DH(V)125-227-30.5   | 182                    | 32.6              | 1450                   | 21.4                       | 30                          | 76.5              | 2.8                        |
|                     | 227                    | 30.5              |                        | 24.5                       |                             | 78.5              |                            |
|                     | 272                    | 27.5              |                        | 26.8                       |                             | 76                |                            |
| DH(V)125-198-24.5   | 158                    | 26.3              | 1450                   | 14.9                       | 22                          | 77.8              | 2.7                        |
|                     | 198                    | 24.5              |                        | 17.4                       |                             | 78                |                            |
|                     | 238                    | 21.8              |                        | 18.8                       |                             | 75.2              |                            |
| DH(V)125-328-76-O   | 262                    | 82                | 1450                   | 73.7                       | 110                         | 79.5              | 2.8                        |
|                     | 328                    | 76                |                        | 82.7                       |                             | 82                |                            |
|                     | 393                    | 70                |                        | 96.4                       |                             | 77.8              |                            |
| DH(V)125-292-66.5   | 233                    | 70                | 1450                   | 56.7                       | 90                          | 78.5              | 2.7                        |
|                     | 292                    | 66.5              |                        | 67.3                       |                             | 80                |                            |
|                     | 342                    | 62                |                        | 74.8                       |                             | 77.2              |                            |
| DH(V)125-256-56     | 205                    | 60                | 1450                   | 44                         | 75                          | 76                | 2.5                        |
|                     | 256                    | 56                |                        | 50.6                       |                             | 77                |                            |
|                     | 307                    | 51.5              |                        | 56.6                       |                             | 76                |                            |
| DH(V)125-230-47     | 184                    | 50                | 1450                   | 34.2                       | 45                          | 73.5              | 2.5                        |
|                     | 230                    | 47                |                        | 38.8                       |                             | 76.5              |                            |
|                     | 252                    | 45                |                        | 40.7                       |                             | 76                |                            |
| DH(V)125-293-69.5-O | 235                    | 75                | 1450                   | 61.7                       | 90                          | 77.7              | 3.2                        |
|                     | 293                    | 69.5              |                        | 70.3                       |                             | 79                |                            |
|                     | 352                    | 63                |                        | 78.5                       |                             | 77                |                            |
| DH(V)125-272-60.5   | 217                    | 65                | 1450                   | 50.1                       | 75                          | 76.8              | 2.9                        |
|                     | 272                    | 60.5              |                        | 57.4                       |                             | 78                |                            |
|                     | 326                    | 55                |                        | 64.3                       |                             | 76                |                            |
| DH(V)125-227-53     | 181                    | 57                | 1450                   | 37.5                       | 55                          | 75.1              | 2.6                        |
|                     | 227                    | 53                |                        | 42.5                       |                             | 77                |                            |
|                     | 272                    | 48.3              |                        | 47.3                       |                             | 75.8              |                            |
| DH(V)125-202-45     | 161                    | 47.5              | 1450                   | 28.2                       | 37                          | 74                | 2.5                        |
|                     | 202                    | 45                |                        | 32.5                       |                             | 76                |                            |
|                     | 234                    | 40                |                        | 34.6                       |                             | 74                |                            |
| DH(V)150-443-21-O   | 354                    | 24                | 1450                   | 27.1                       | 37                          | 85.6              | 2.9                        |
|                     | 443                    | 21                |                        | 29.1                       |                             | 87                |                            |
|                     | 531                    | 17.5              |                        | 30.3                       |                             | 83.5              |                            |
| DH(V)150-403-18     | 323                    | 21                | 1450                   | 22.2                       | 30                          | 83                | 2.9                        |
|                     | 403                    | 18                |                        | 23                         |                             | 86                |                            |
|                     | 484                    | 15                |                        | 24                         |                             | 82.3              |                            |
| DH(V)150-378-15     | 302                    | 17.5              | 1450                   | 18                         | 22                          | 80                | 2.9                        |
|                     | 378                    | 15                |                        | 18.4                       |                             | 84                |                            |
|                     | 454                    | 12.3              |                        | 19.1                       |                             | 79.4              |                            |
| DH(V)150-350-11.5   | 280                    | 13.7              | 1450                   | 13.9                       | 18.5                        | 75                | 3                          |
|                     | 350                    | 11.5              |                        | 14.2                       |                             | 77                |                            |
|                     | 396                    | 10                |                        | 14.2                       |                             | 76                |                            |
| DH(V)150-396-20.4-O | 317                    | 23.4              | 1450                   | 24                         | 30                          | 84.2              | 3                          |
|                     | 396                    | 20.4              |                        | 25.6                       |                             | 86                |                            |
|                     | 475                    | 16.6              |                        | 25.7                       |                             | 83.5              |                            |
| DH(V)150-378-17     | 302                    | 20                | 1450                   | 19.9                       | 22                          | 82.8              | 3.1                        |
|                     | 378                    | 17                |                        | 20.6                       | 30                          | 85                |                            |
|                     | 454                    | 13.7              |                        | 20.7                       |                             | 82                |                            |
| DH(V)150-353-14.5   | 282                    | 17.5              | 1450                   | 16.6                       | 18.5                        | 80.6              | 3.1                        |
|                     | 353                    | 14.5              |                        | 16.6                       | 22                          | 84                |                            |
|                     | 423                    | 11.3              |                        | 16.5                       |                             | 79                |                            |
| DH(V)150-331-11.5   | 265                    | 14                | 1450                   | 13                         | 15                          | 76.7              | 3.1                        |
|                     | 331                    | 11.5              |                        | 13                         |                             | 80                |                            |
|                     | 378                    | 9.8               |                        | 13.3                       |                             | 76                |                            |
| DH(V)150-446-38-O   | 357                    | 41.3              | 1450                   | 48.4                       | 75                          | 83                | 3                          |
|                     | 446                    | 38                |                        | 54.3                       |                             | 85                |                            |
|                     | 536                    | 34.2              |                        | 60.4                       |                             | 82.7              |                            |
| DH(V)150-403-31     | 323                    | 34.2              | 1450                   | 36.9                       | 45                          | 81.5              | 3                          |
|                     | 403                    | 31                |                        | 41                         | 55                          | 83                |                            |
|                     | 484                    | 26.3              |                        | 42.9                       |                             | 80.8              |                            |





## 性能参数 Performance parameters

| 型号<br>Type         | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|--------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                    |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)150-370-25    | 298                    | 28.7              | 1450                   | 29.4                       | 37                          | 79                | 3                          |
|                    | 370                    | 25                |                        | 31.2                       |                             | 81                |                            |
|                    | 445                    | 21                |                        | 32.3                       |                             | 78.8              |                            |
| DH(V)150-331-20    | 265                    | 23.4              | 1450                   | 22.1                       | 30                          | 76.5              | 3.1                        |
|                    | 331                    | 20                |                        | 23.1                       |                             | 78                |                            |
|                    | 389                    | 16.7              |                        | 23.3                       |                             | 77.6              |                            |
| DH(V)150-407-35-O  | 325                    | 39.2              | 1450                   | 42.3                       | 55                          | 82.1              | 3                          |
|                    | 407                    | 35                |                        | 46.2                       |                             | 84                |                            |
|                    | 488                    | 30                |                        | 49.3                       |                             | 81                |                            |
| DH(V)150-367-29.5  | 294                    | 33                | 1450                   | 32.8                       | 45                          | 80.5              | 3                          |
|                    | 367                    | 29.5              |                        | 36                         |                             | 82                |                            |
|                    | 440                    | 25                |                        | 37.5                       |                             | 80                |                            |
| DH(V)150-334-25    | 267                    | 27.5              | 1450                   | 25.4                       | 37                          | 78.8              | 3                          |
|                    | 334                    | 25                |                        | 28.5                       |                             | 80                |                            |
|                    | 400                    | 21.3              |                        | 29.8                       |                             | 78                |                            |
| DH(V)150-292-20.5  | 233                    | 22.8              | 1450                   | 19.2                       | 30                          | 75.7              | 3                          |
|                    | 292                    | 20.5              |                        | 20.9                       |                             | 78                |                            |
|                    | 350                    | 17.5              |                        | 22                         |                             | 76                |                            |
| DH(V)150-515-66-O  | 412                    | 71                | 1450                   | 99.4                       | 132                         | 80.2              | 3.9                        |
|                    | 515                    | 66                |                        | 112.8                      |                             | 82                |                            |
|                    | 618                    | 60                |                        | 126.2                      |                             | 80                |                            |
| DH(V)150-472-54.5  | 377                    | 58                | 1450                   | 75.2                       | 110                         | 79.3              | 3.8                        |
|                    | 472                    | 54.5              |                        | 86.4                       |                             | 81                |                            |
|                    | 566                    | 48                |                        | 94.9                       |                             | 78                |                            |
| DH(V)150-432-43.5  | 346                    | 47.5              | 1450                   | 57                         | 75                          | 78.5              | 3.7                        |
|                    | 432                    | 43.5              |                        | 64                         |                             | 80                |                            |
|                    | 516                    | 37                |                        | 69.7                       |                             | 75                |                            |
| DH(V)150-396-35    | 317                    | 38                | 1450                   | 42.6                       | 55                          | 77                | 3.3                        |
|                    | 396                    | 35                |                        | 48.1                       |                             | 78.5              |                            |
|                    | 475                    | 28.2              |                        | 50.7                       |                             | 72                |                            |
| DH(V)150-440-60-O  | 350                    | 65                | 1450                   | 78.3                       | 110                         | 79.5              | 3.9                        |
|                    | 440                    | 60                |                        | 88.6                       |                             | 81                |                            |
|                    | 527                    | 53.5              |                        | 97.6                       |                             | 78.7              |                            |
| DH(V)150-403-50    | 323                    | 54                | 1450                   | 60.3                       | 90                          | 78.7              | 3.7                        |
|                    | 403                    | 50                |                        | 68.2                       |                             | 80.5              |                            |
|                    | 484                    | 44.5              |                        | 75.2                       |                             | 78                |                            |
| DH(V)150-375-40    | 300                    | 44.4              | 1450                   | 46.5                       | 75                          | 78                | 3.4                        |
|                    | 375                    | 40                |                        | 51                         |                             | 80                |                            |
|                    | 450                    | 34.5              |                        | 57.1                       |                             | 74                |                            |
| DH(V)150-324-33    | 260                    | 35.5              | 1450                   | 33.5                       | 45                          | 74.8              | 3.2                        |
|                    | 324                    | 33                |                        | 37.3                       |                             | 78                |                            |
|                    | 390                    | 28.4              |                        | 40.7                       |                             | 74                |                            |
| DH(V)150-583-105-O | 467                    | 112               | 1450                   | 182.6                      | 250                         | 78                | 4.2                        |
|                    | 583                    | 105               |                        | 206                        |                             | 81                |                            |
|                    | 700                    | 95.5              |                        | 233.4                      |                             | 78                |                            |
| DH(V)150-550-88.5  | 440                    | 96                | 1450                   | 151.1                      | 200                         | 76.3              | 4                          |
|                    | 550                    | 88.5              |                        | 168                        |                             | 79                |                            |
|                    | 648                    | 81                |                        | 187.5                      |                             | 76.3              |                            |
| DH(V)150-515-75    | 412                    | 82                | 1450                   | 120                        | 160                         | 76.6              | 3.8                        |
|                    | 515                    | 75                |                        | 134.8                      |                             | 78                |                            |
|                    | 605                    | 68                |                        | 151.4                      |                             | 74                |                            |
| DH(V)150-472-61.5  | 378                    | 67.5              | 1450                   | 92.3                       | 110                         | 75.2              | 3.5                        |
|                    | 472                    | 61.5              |                        | 102.6                      |                             | 77                |                            |
|                    | 526                    | 55.2              |                        | 106.8                      |                             | 74                |                            |
| DH(V)150-536-90-O  | 430                    | 98                | 1450                   | 149.2                      | 200                         | 76.8              | 4.7                        |
|                    | 536                    | 90                |                        | 166.4                      |                             | 79                |                            |
|                    | 617                    | 82                |                        | 181.5                      |                             | 76                |                            |
| DH(V)150-490-78    | 392                    | 85                | 1450                   | 118.9                      | 160                         | 76.3              | 4.2                        |
|                    | 490                    | 78                |                        | 133.3                      |                             | 78                |                            |
|                    | 576                    | 70                |                        | 148.1                      |                             | 74.2              |                            |
| DH(V)150-446-68.5  | 357                    | 75                | 1450                   | 96.2                       | 132                         | 75.9              | 4                          |
|                    | 446                    | 68.5              |                        | 108.2                      |                             | 77                |                            |
|                    | 535                    | 60                |                        | 118.4                      |                             | 74                |                            |
| DH(V)150-403-57.5  | 323                    | 62.5              | 1450                   | 73.4                       | 110                         | 74.9              | 3.6                        |
|                    | 403                    | 57.5              |                        | 83.1                       |                             | 76                |                            |
|                    | 484                    | 50                |                        | 91.6                       |                             | 72                |                            |
| DH(V)200-695-30-O  | 556                    | 34                | 1450                   | 60                         | 75                          | 86                | 3.8                        |
|                    | 695                    | 30                |                        | 64.9                       |                             | 87.5              |                            |
|                    | 834                    | 25                |                        | 67.2                       |                             | 84.5              |                            |

## 性能参数 Performance parameters

| 型号<br>Type          | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|---------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                     |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)200-648-25.5   | 518                    | 29                | 1450                   | 48.8                       | 75                          | 84                | 4                          |
|                     | 648                    | 25.5              |                        | 52                         |                             | 86.5              |                            |
|                     | 778                    | 21.3              |                        | 54                         |                             | 83.5              |                            |
| DH(V)200-601-21.3   | 481                    | 25                | 1450                   | 40.7                       | 45                          | 80.5              | 4.1                        |
|                     | 601                    | 21.3              |                        | 41                         |                             | 85                |                            |
|                     | 720                    | 17.2              |                        | 42.3                       |                             | 80                |                            |
| DH(V)200-550-17     | 440                    | 18.9              | 1450                   | 29                         | 37                          | 78                | 4.1                        |
|                     | 550                    | 17                |                        | 32.3                       |                             | 79                |                            |
|                     | 612                    | 15.3              |                        | 32.9                       |                             | 77.5              |                            |
| DH(V)200-637-28-O   | 510                    | 32.3              | 1450                   | 52.7                       | 75                          | 85.2              | 3                          |
|                     | 637                    | 28                |                        | 56.2                       |                             | 86.5              |                            |
|                     | 765                    | 23.4              |                        | 58                         |                             | 84                |                            |
| DH(V)200-594-24.5   | 475                    | 28.5              | 1450                   | 44                         | 55                          | 83.8              | 3.2                        |
|                     | 594                    | 24.5              |                        | 46.1                       |                             | 86                |                            |
|                     | 713                    | 20                |                        | 46.9                       |                             | 82.9              |                            |
| DH(V)200-558-21     | 445                    | 23.8              | 1450                   | 35.6                       | 45                          | 81.3              | 3.4                        |
|                     | 558                    | 21                |                        | 38                         |                             | 84                |                            |
|                     | 670                    | 17.2              |                        | 38.4                       |                             | 81.8              |                            |
| DH(V)200-515-17     | 412                    | 20                | 1450                   | 28.8                       | 37                          | 78                | 3.8                        |
|                     | 515                    | 17                |                        | 29.1                       |                             | 82                |                            |
|                     | 595                    | 14.2              |                        | 29.5                       |                             | 78                |                            |
| DH(V)200-709-52-O   | 567                    | 57                | 1450                   | 104                        | 132                         | 84.5              | 3.9                        |
|                     | 709                    | 52                |                        | 116                        |                             | 86.5              |                            |
|                     | 850                    | 47                |                        | 129                        |                             | 84.5              |                            |
| DH(V)200-630-42.5   | 504                    | 47.5              | 1450                   | 79.1                       | 110                         | 82.5              | 3.9                        |
|                     | 630                    | 42.5              |                        | 86.3                       |                             | 84.5              |                            |
|                     | 756                    | 37.5              |                        | 93.1                       |                             | 83                |                            |
| DH(V)200-572-35.5   | 458                    | 40                | 1450                   | 62                         | 75                          | 80.5              | 3.9                        |
|                     | 572                    | 35.5              |                        | 66.7                       |                             | 83                |                            |
|                     | 687                    | 30                |                        | 68.8                       |                             | 81.6              |                            |
| DH(V)200-511-27.5   | 409                    | 32.5              | 1450                   | 45.8                       | 55                          | 79                | 4                          |
|                     | 511                    | 27.5              |                        | 49                         |                             | 81                |                            |
|                     | 613                    | 24                |                        | 50.1                       |                             | 80                |                            |
| DH(V)200-648-48.5-O | 518                    | 54                | 1450                   | 90.8                       | 110                         | 84                | 3.5                        |
|                     | 648                    | 48.5              |                        | 99.1                       |                             | 85.5              |                            |
|                     | 778                    | 42                |                        | 107                        |                             | 83.5              |                            |
| DH(V)200-583-40.5   | 467                    | 45                | 1450                   | 69.8                       | 90                          | 82                | 3.5                        |
|                     | 583                    | 40.5              |                        | 76.6                       |                             | 84                |                            |
|                     | 700                    | 35                |                        | 81.9                       |                             | 81.5              |                            |
| DH(V)200-530-34.5   | 423                    | 38                | 1450                   | 54.8                       | 75                          | 80                | 3.7                        |
|                     | 530                    | 34.5              |                        | 60.6                       |                             | 82                |                            |
|                     | 635                    | 29                |                        | 63.1                       |                             | 79.5              |                            |
| DH(V)200-468-28     | 375                    | 31.5              | 1450                   | 41.5                       | 55                          | 77.5              | 3.8                        |
|                     | 468                    | 28                |                        | 45.8                       |                             | 78                |                            |
|                     | 562                    | 24                |                        | 47.5                       |                             | 77.3              |                            |
| DH(V)200-817-91-O   | 654                    | 97                | 1450                   | 210                        | 280                         | 82.2              | 4                          |
|                     | 817                    | 91                |                        | 241                        | 315                         | 84                |                            |
|                     | 980                    | 83                |                        | 272                        |                             | 81.5              |                            |
| DH(V)200-756-76.5   | 605                    | 82.5              | 1450                   | 170                        | 220                         | 80.2              | 4.5                        |
|                     | 756                    | 76.5              |                        | 192                        | 250                         | 83                |                            |
|                     | 907                    | 70                |                        | 215                        |                             | 80.4              |                            |
| DH(V)200-706-62.5   | 565                    | 67                | 1450                   | 132                        | 185                         | 78.1              | 3.7                        |
|                     | 706                    | 62.5              |                        | 148                        |                             | 81                |                            |
|                     | 847                    | 55                |                        | 163                        |                             | 78                |                            |
| DH(V)200-648-47.5   | 518                    | 52.3              | 1450                   | 98                         | 132                         | 75.5              | 3.5                        |
|                     | 648                    | 47.5              |                        | 107                        |                             | 78.5              |                            |
|                     | 778                    | 42                |                        | 117                        |                             | 76.2              |                            |
| DH(V)200-734-81.7-O | 588                    | 88                | 1450                   | 175                        | 220                         | 80.3              | 3.5                        |
|                     | 734                    | 81.7              |                        | 197                        | 250                         | 83                |                            |
|                     | 880                    | 73.2              |                        | 219                        |                             | 80.3              |                            |
| DH(V)200-695-68     | 556                    | 74                | 1450                   | 141                        | 185                         | 79.6              | 3.8                        |
|                     | 695                    | 68                |                        | 159                        |                             | 81                |                            |
|                     | 834                    | 60                |                        | 172                        |                             | 79.3              |                            |
| DH(V)200-655-55     | 524                    | 60                | 1450                   | 109                        | 160                         | 78.5              | 3.6                        |
|                     | 655                    | 55                |                        | 123                        |                             | 80                |                            |
|                     | 786                    | 48.8              |                        | 134                        |                             | 78                |                            |
| DH(V)200-598-43.5   | 478                    | 48                | 1450                   | 81                         | 110                         | 76.8              | 2.9                        |
|                     | 598                    | 43.5              |                        | 91                         |                             | 78                |                            |
|                     | 717                    | 38                |                        | 98                         |                             | 76                |                            |



## 性能参数 Performance parameters

| 型号<br>Type           | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|----------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                      |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)200-792-150-O   | 634                    | 157.5             | 1450                   | 350                        | 500                         | 77.7              | 3.6                        |
|                      | 792                    | 150               |                        | 404                        |                             | 80                |                            |
|                      | 936                    | 140               |                        | 457                        |                             | 78.2              |                            |
| DH(V)200-745-127     | 596                    | 134.5             | 1450                   | 285                        | 400                         | 76.7              | 3.4                        |
|                      | 745                    | 127               |                        | 328                        |                             | 78.5              |                            |
|                      | 894                    | 114.5             |                        | 367                        |                             | 76                |                            |
| DH(V)200-702-107     | 562                    | 114.5             | 1450                   | 231                        | 315                         | 76                | 3.2                        |
|                      | 702                    | 107               |                        | 266                        |                             | 77                |                            |
|                      | 842                    | 95.5              |                        | 293                        |                             | 74.8              |                            |
| DH(V)200-659-88      | 527                    | 95.5              | 1450                   | 183                        | 250                         | 74.8              | 3                          |
|                      | 659                    | 88                |                        | 208                        |                             | 76                |                            |
|                      | 770                    | 80                |                        | 227                        |                             | 74                |                            |
| DH(V)200-720-132.5-O | 576                    | 142               | 1450                   | 289                        | 400                         | 77.2              | 3.4                        |
|                      | 720                    | 132.5             |                        | 329                        |                             | 79                |                            |
|                      | 864                    | 120               |                        | 372                        |                             | 76                |                            |
| DH(V)200-662-114.5   | 530                    | 123               | 1450                   | 231                        | 315                         | 76.8              | 3.3                        |
|                      | 662                    | 114.5             |                        | 263                        |                             | 78.5              |                            |
|                      | 795                    | 104               |                        | 296                        |                             | 76                |                            |
| DH(V)200-616-98.5    | 493                    | 106               | 1450                   | 187                        | 250                         | 76.1              | 3.2                        |
|                      | 616                    | 98.5              |                        | 212                        |                             | 78                |                            |
|                      | 720                    | 90                |                        | 232                        |                             | 76                |                            |
| DH(V)200-569-83      | 455                    | 90                | 1450                   | 149                        | 200                         | 74.8              | 2.9                        |
|                      | 569                    | 83                |                        | 167                        |                             | 77                |                            |
|                      | 683                    | 73                |                        | 184                        |                             | 74                |                            |
| DH(V)250-1051-39-O   | 840                    | 44                | 1450                   | 118                        | 160                         | 85.3              | 4.7                        |
|                      | 1051                   | 39                |                        | 127                        |                             | 88                |                            |
|                      | 1260                   | 33.5              |                        | 137                        |                             | 84                |                            |
| DH(V)250-994-33      | 795                    | 37.5              | 1450                   | 99                         | 110                         | 82.3              | 5                          |
|                      | 994                    | 33                |                        | 104                        |                             | 86                |                            |
|                      | 1192                   | 27.7              |                        | 109                        |                             | 82.3              |                            |
| DH(V)250-943-27      | 755                    | 31.5              | 1450                   | 83                         | 90                          | 78                | 5                          |
|                      | 943                    | 27                |                        | 83.6                       |                             | 83                |                            |
|                      | 1131                   | 21                |                        | 83.6                       |                             | 77.5              |                            |
| DH(V)250-870-20      | 756                    | 23                | 1450                   | 62.3                       | 75                          | 76                | 5                          |
|                      | 871                    | 20                |                        | 61.2                       |                             | 77.5              |                            |
|                      | 1008                   | 16                |                        | 57.8                       |                             | 76                |                            |
| DH(V)250-1029-37-O   | 823                    | 42.3              | 1450                   | 112                        | 132                         | 84.5              | 4.7                        |
|                      | 1029                   | 37                |                        | 119                        |                             | 87                |                            |
|                      | 1235                   | 31                |                        | 124                        |                             | 84.3              |                            |
| DH(V)250-968-32      | 775                    | 37                | 1450                   | 94.9                       | 110                         | 82.3              | 4.7                        |
|                      | 968                    | 32                |                        | 98.1                       |                             | 86                |                            |
|                      | 1162                   | 27                |                        | 103.6                      |                             | 82.5              |                            |
| DH(V)250-914-27      | 732                    | 32                | 1450                   | 79.7                       | 90                          | 80                | 4.7                        |
|                      | 914                    | 27                |                        | 80                         |                             | 84                |                            |
|                      | 1097                   | 22                |                        | 82.2                       |                             | 80                |                            |
| DH(V)250-850-22      | 680                    | 25.6              | 1450                   | 61.6                       | 75                          | 77                | 4.7                        |
|                      | 850                    | 22                |                        | 62.1                       |                             | 82                |                            |
|                      | 1020                   | 17                |                        | 61.3                       |                             | 77                |                            |
| DH(V)250-1173-66-O   | 938                    | 73.5              | 1450                   | 222                        | 280                         | 84.8              | 4.1                        |
|                      | 1173                   | 66                |                        | 239                        |                             | 88                |                            |
|                      | 1408                   | 58                |                        | 262                        |                             | 85                |                            |
| DH(V)250-1080-55     | 864                    | 60.5              | 1450                   | 166                        | 220                         | 82.8              | 4                          |
|                      | 1080                   | 55                |                        | 188                        |                             | 86                |                            |
|                      | 1296                   | 47.5              |                        | 202                        |                             | 83                |                            |
| DH(V)250-1000-45.5   | 800                    | 50                | 1450                   | 136                        | 185                         | 80                | 4                          |
|                      | 1000                   | 45.5              |                        | 149                        |                             | 83                |                            |
|                      | 1200                   | 38                |                        | 160                        |                             | 77.6              |                            |
| DH(V)250-929-37.5    | 743                    | 42                | 1450                   | 110                        | 132                         | 77                | 4                          |
|                      | 929                    | 37.5              |                        | 119                        |                             | 80                |                            |
|                      | 1115                   | 32                |                        | 126                        |                             | 77                |                            |
| DH(V)250-1044-55.5-O | 864                    | 62                | 1450                   | 177                        | 220                         | 82.5              | 4.1                        |
|                      | 1044                   | 55.5              |                        | 191                        |                             | 84                |                            |
|                      | 1296                   | 45                |                        | 199                        |                             | 80                |                            |
| DH(V)250-976-47      | 780                    | 53.5              | 1450                   | 141                        | 185                         | 81                | 4.1                        |
|                      | 976                    | 47                |                        | 149                        |                             | 84                |                            |
|                      | 1171                   | 42                |                        | 163                        |                             | 82                |                            |
| DH(V)250-886-40.5    | 708                    | 45                | 1450                   | 111                        | 132                         | 78.6              | 3.6                        |
|                      | 886                    | 40.5              |                        | 121                        |                             | 80.5              |                            |
|                      | 1063                   | 34                |                        | 126                        |                             | 78                |                            |

## 性能参数 Performance parameters

| 型号<br>Type           | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|----------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                      |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)250-803-34.5    | 642                    | 40                | 1450                   | 94.6                       | 110                         | 74                | 3.6                        |
|                      | 803                    | 34.5              |                        | 96.1                       |                             | 78.5              |                            |
|                      | 963                    | 28.5              |                        | 98.4                       |                             | 76                |                            |
| DH(V)250-1242-116-O  | 994                    | 126               | 1450                   | 411                        | 560                         | 83                | 4.6                        |
|                      | 1242                   | 116               |                        | 467                        |                             | 84                |                            |
|                      | 1490                   | 105               |                        | 520                        |                             | 82                |                            |
| DH(V)250-1166-100    | 933                    | 108               | 1450                   | 333                        | 450                         | 82.5              | 4.5                        |
|                      | 1166                   | 100               |                        | 380                        |                             | 83.5              |                            |
|                      | 1400                   | 90                |                        | 421                        |                             | 81.5              |                            |
| DH(V)250-1084-83     | 867                    | 90                | 1450                   | 262                        | 315                         | 81.3              | 4.3                        |
|                      | 1084                   | 83                |                        | 295                        |                             | 83                |                            |
|                      | 1300                   | 73.5              |                        | 322                        |                             | 81                |                            |
| DH(V)250-1000-66     | 800                    | 74                | 1450                   | 201                        | 250                         | 80.3              | 4                          |
|                      | 1000                   | 66                |                        | 218                        |                             | 82.5              |                            |
|                      | 1200                   | 60                |                        | 244                        |                             | 80.5              |                            |
| DH(V)250-1044-104-O  | 835                    | 114               | 1450                   | 320                        | 400                         | 81.2              | 3.7                        |
|                      | 1044                   | 104               |                        | 356                        |                             | 83                |                            |
|                      | 1253                   | 91.5              |                        | 381                        |                             | 82                |                            |
| DH(V)250-965-90      | 772                    | 98                | 1450                   | 255                        | 315                         | 80.8              | 3.6                        |
|                      | 965                    | 90                |                        | 287                        |                             | 82.5              |                            |
|                      | 1158                   | 80                |                        | 311                        |                             | 81.3              |                            |
| DH(V)250-875-74.5    | 700                    | 80.3              | 1450                   | 192                        | 250                         | 80                | 3.3                        |
|                      | 875                    | 74.5              |                        | 218                        |                             | 81.5              |                            |
|                      | 1050                   | 66                |                        | 235                        |                             | 80.3              |                            |
| DH(V)250-800-62      | 640                    | 67.5              | 1450                   | 149                        | 200                         | 79                | 3.1                        |
|                      | 800                    | 62                |                        | 168                        |                             | 80.5              |                            |
|                      | 960                    | 56.5              |                        | 186                        |                             | 79.5              |                            |
| DH(V)250-1130-175-O  | 904                    | 184               | 1450                   | 579                        | 800                         | 78.3              | 3.4                        |
|                      | 1130                   | 175               |                        | 674                        |                             | 80                |                            |
|                      | 1356                   | 164               |                        | 775                        |                             | 78.2              |                            |
| DH(V)250-978-152     | 782                    | 161               | 1450                   | 444                        | 630                         | 77.2              | 3.3                        |
|                      | 978                    | 152               |                        | 513                        |                             | 79                |                            |
|                      | 1174                   | 141               |                        | 578                        |                             | 78                |                            |
| DH(V)250-922-128     | 738                    | 136               | 1450                   | 358                        | 500                         | 76.5              | 3.2                        |
|                      | 922                    | 128               |                        | 415                        |                             | 77.5              |                            |
|                      | 1106                   | 118               |                        | 465                        |                             | 76.5              |                            |
| DH(V)250-865-106     | 692                    | 113               | 1450                   | 280                        | 400                         | 76.1              | 3                          |
|                      | 865                    | 106               |                        | 325                        |                             | 76.5              |                            |
|                      | 1038                   | 99                |                        | 360                        |                             | 75.5              |                            |
| DH(V)300-1098-24.5-O | 878                    | 28.8              | 1450                   | 83.8                       | 110                         | 82.3              | 5.3                        |
|                      | 1098                   | 24.5              |                        | 85.2                       |                             | 86.5              |                            |
|                      | 1318                   | 20                |                        | 89.4                       |                             | 80.3              |                            |
| DH(V)300-1044-19.8   | 835                    | 23.5              | 1450                   | 66.4                       | 75                          | 80.5              | 5.5                        |
|                      | 1044                   | 19.8              |                        | 66.6                       |                             | 84.5              |                            |
|                      | 1253                   | 15                |                        | 63.2                       |                             | 81                |                            |
| DH(V)300-1008-15.5   | 806                    | 19                | 1450                   | 52.8                       | 55                          | 79                | 5.7                        |
|                      | 1008                   | 15.5              |                        | 51.9                       |                             | 82                |                            |
|                      | 1210                   | 11.4              |                        | 48.2                       |                             | 78                |                            |
| DH(V)300-965-11.5    | 772                    | 15                | 1450                   | 41.5                       | 45                          | 76                | 6                          |
|                      | 965                    | 11.5              |                        | 37.8                       |                             | 80                |                            |
|                      | 1158                   | 7.5               |                        | 32                         |                             | 74                |                            |
| DH(V)300-936-23-O    | 745                    | 26.2              | 1450                   | 64.4                       | 75                          | 83                | 4.1                        |
|                      | 936                    | 23                |                        | 69                         |                             | 85                |                            |
|                      | 1123                   | 20                |                        | 72.9                       |                             | 84                |                            |
| DH(V)300-864-20      | 691                    | 24                | 1450                   | 56.2                       | 75                          | 80.5              | 4.1                        |
|                      | 864                    | 20                |                        | 56                         |                             | 84                |                            |
|                      | 1037                   | 15.8              |                        | 55.1                       |                             | 81                |                            |
| DH(V)300-800-16.7    | 639                    | 20                | 1450                   | 45.5                       | 55                          | 76.5              | 4.2                        |
|                      | 800                    | 16.7              |                        | 44.9                       |                             | 81                |                            |
|                      | 960                    | 13.5              |                        | 44.6                       |                             | 79                |                            |
| DH(V)300-700-15      | 560                    | 17.5              | 1450                   | 37.1                       | 45                          | 72                | 4.3                        |
|                      | 700                    | 15                |                        | 37.1                       |                             | 77                |                            |
|                      | 840                    | 12                |                        | 36.1                       |                             | 76                |                            |
| DH(V)300-1677-53-O   | 1342                   | 60                | 1450                   | 257                        | 315                         | 85.5              | 7.1                        |
|                      | 1677                   | 53                |                        | 275                        |                             | 89                |                            |
|                      | 2012                   | 46                |                        | 295                        |                             | 85.5              |                            |
| DH(V)300-1577-45     | 1262                   | 52                | 1450                   | 213                        | 250                         | 84                | 7.2                        |
|                      | 1577                   | 45                |                        | 223                        |                             | 86.5              |                            |
|                      | 1892                   | 37.5              |                        | 230                        |                             | 84                |                            |



## 性能参数 Performance parameters

| 型号<br>Type           | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|----------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                      |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)300-1476-36.5   | 1181                   | 42.5              | 1450                   | 171                        | 200                         | 80                | 7.4                        |
|                      | 1476                   | 36.5              |                        | 175                        |                             | 84                |                            |
|                      | 1771                   | 28.5              |                        | 172                        |                             | 80                |                            |
| DH(V)300-1360-27.5   | 1088                   | 33.8              | 1450                   | 132                        | 160                         | 76                | 7.4                        |
|                      | 1360                   | 27.5              |                        | 129                        |                             | 79                |                            |
|                      | 1530                   | 24                |                        | 128                        |                             | 78                |                            |
| DH(V)300-1620-51.5-O | 1396                   | 57.5              | 1450                   | 240                        | 315                         | 84.8              | 6.9                        |
|                      | 1620                   | 51.5              |                        | 260                        |                             | 88                |                            |
|                      | 1944                   | 43.5              |                        | 273                        |                             | 84.5              |                            |
| DH(V)300-1519-45     | 1215                   | 51.5              | 1450                   | 206                        | 250                         | 83                | 6.9                        |
|                      | 1519                   | 45                |                        | 215                        |                             | 86.5              |                            |
|                      | 1823                   | 37.5              |                        | 222                        |                             | 84                |                            |
| DH(V)300-1422-37.5   | 1138                   | 43.5              | 1450                   | 168                        | 200                         | 80.5              | 6.9                        |
|                      | 1422                   | 37.5              |                        | 173                        |                             | 84                |                            |
|                      | 1706                   | 30                |                        | 174                        |                             | 80                |                            |
| DH(V)300-1332-30.5   | 1066                   | 35                | 1450                   | 130                        | 160                         | 78                | 6.9                        |
|                      | 1332                   | 30.5              |                        | 136                        |                             | 81.5              |                            |
|                      | 1598                   | 24.5              |                        | 138                        |                             | 77.5              |                            |
| DH(V)300-1746-94-O   | 1397                   | 101.5             | 1450                   | 454                        | 630                         | 85.2              | 5.7                        |
|                      | 1746                   | 94                |                        | 520                        |                             | 87                |                            |
|                      | 2095                   | 83.5              |                        | 570                        |                             | 83.5              |                            |
| DH(V)300-1645-76     | 1316                   | 83.5              | 1450                   | 357                        | 450                         | 83.8              | 6.4                        |
|                      | 1645                   | 76                |                        | 389                        |                             | 85.5              |                            |
|                      | 1974                   | 67                |                        | 433                        |                             | 83.3              |                            |
| DH(V)300-1573-62     | 1258                   | 68                | 1450                   | 281                        | 355                         | 83                | 6.7                        |
|                      | 1573                   | 62                |                        | 313                        |                             | 85                |                            |
|                      | 1888                   | 54                |                        | 339                        |                             | 82                |                            |
| DH(V)300-1516-50     | 1213                   | 57                | 1450                   | 232                        | 280                         | 81.2              | 7.2                        |
|                      | 1516                   | 50                |                        | 247                        |                             | 83.5              |                            |
|                      | 1819                   | 42                |                        | 260                        |                             | 80                |                            |
| DH(V)300-1548-80-O   | 1238                   | 88.5              | 1450                   | 359                        | 450                         | 83.2              | 5.15                       |
|                      | 1548                   | 80                |                        | 399                        |                             | 85                |                            |
|                      | 1858                   | 70                |                        | 427                        |                             | 83                |                            |
| DH(V)300-1447-67     | 1158                   | 75                | 1450                   | 286                        | 355                         | 82.7              | 5.55                       |
|                      | 1447                   | 67                |                        | 316                        |                             | 83.5              |                            |
|                      | 1736                   | 57                |                        | 331                        |                             | 81.5              |                            |
| DH(V)300-1361-57     | 1089                   | 64                | 1450                   | 235                        | 280                         | 81                | 6.15                       |
|                      | 1361                   | 57                |                        | 255                        |                             | 83                |                            |
|                      | 1633                   | 50                |                        | 273                        |                             | 81.5              |                            |
| DH(V)300-1282-47.5   | 1026                   | 53                | 1450                   | 186                        | 220                         | 79.5              | 6.45                       |
|                      | 1282                   | 47.5              |                        | 204                        |                             | 82                |                            |
|                      | 1538                   | 41                |                        | 213                        |                             | 80.8              |                            |
| DH(V)300-1836-160-O  | 1469                   | 170               | 1450                   | 810                        | 1120                        | 84                | 4.95                       |
|                      | 1836                   | 160               |                        | 941                        |                             | 86                |                            |
|                      | 2070                   | 151               |                        | 1011                       |                             | 84.2              |                            |
| DH(V)300-1735-136    | 1388                   | 147               | 1450                   | 662                        | 900                         | 84                | 4.95                       |
|                      | 1735                   | 136               |                        | 760                        |                             | 84.6              |                            |
|                      | 2082                   | 125               |                        | 854                        |                             | 83                |                            |
| DH(V)300-1623-112    | 1298                   | 122               | 1450                   | 521                        | 630                         | 82.8              | 5                          |
|                      | 1623                   | 112               |                        | 587                        | 710                         | 84.3              |                            |
|                      | 1948                   | 100               |                        | 647                        |                             | 82                |                            |
| DH(V)300-1537-91     | 1230                   | 100               | 1450                   | 408                        | 800                         | 82.2              | 5                          |
|                      | 1537                   | 91                |                        | 454                        | 900                         | 84                |                            |
|                      | 1845                   | 80                |                        | 500                        |                             | 80.5              |                            |
| DH(V)300-1688-139-O  | 1350                   | 152               | 1450                   | 679                        | 500                         | 82.3              | 5.15                       |
|                      | 1688                   | 139               |                        | 765                        | 560                         | 83.5              |                            |
|                      | 2026                   | 124               |                        | 840                        |                             | 81.5              |                            |
| DH(V)300-1573-119    | 1258                   | 130               | 1450                   | 544                        | 710                         | 82                | 4.85                       |
|                      | 1573                   | 119               |                        | 614                        |                             | 83                |                            |
|                      | 1888                   | 105               |                        | 667                        |                             | 81                |                            |
| DH(V)300-1450-99     | 1160                   | 108               | 1450                   | 422                        | 560                         | 81                | 4.35                       |
|                      | 1450                   | 99                |                        | 474                        |                             | 82.5              |                            |
|                      | 1740                   | 87                |                        | 512                        |                             | 80.5              |                            |
| DH(V)300-1342-81     | 1074                   | 90                | 1450                   | 328                        | 400                         | 80.3              | 4.1                        |
|                      | 1342                   | 81                |                        | 361                        |                             | 82                |                            |
|                      | 1610                   | 71.5              |                        | 391                        |                             | 80.3              |                            |
| DH(V)350-1731-32-O   | 1385                   | 37.5              | 1450                   | 171                        | 200                         | 83                | 8.1                        |
|                      | 1731                   | 32                |                        | 175                        |                             | 86.5              |                            |
|                      | 2077                   | 25                |                        | 175                        |                             | 81                |                            |

## 性能参数 Performance parameters

| 型号<br>Type           | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|----------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                      |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)350-1692-26.5   | 1354                   | 32                | 1450                   | 146                        | 160                         | 81                | 8.4                        |
|                      | 1692                   | 26.5              |                        | 144                        |                             | 85                |                            |
|                      | 2030                   | 20                |                        | 138                        |                             | 80                |                            |
| DH(V)350-1641-21     | 1313                   | 26.5              | 1450                   | 120                        | 132                         | 78.8              | 8.7                        |
|                      | 1641                   | 21                |                        | 113                        |                             | 83                |                            |
|                      | 1969                   | 15                |                        | 103                        |                             | 78                |                            |
| DH(V)350-1602-15     | 1282                   | 20                | 1450                   | 91                         | 110                         | 76.3              | 8.9                        |
|                      | 1602                   | 15                |                        | 81                         |                             | 80.5              |                            |
|                      | 1922                   | 9                 |                        | 64                         |                             | 74                |                            |
| DH(V)350-1422-31-O   | 1138                   | 35.5              | 1450                   | 133                        | 160                         | 83                | 6.2                        |
|                      | 1422                   | 31                |                        | 140                        |                             | 85.5              |                            |
|                      | 1706                   | 25.8              |                        | 144                        |                             | 83.3              |                            |
| DH(V)350-1335-26.3   | 1068                   | 30.5              | 1450                   | 110                        | 132                         | 81                | 6.2                        |
|                      | 1335                   | 26.3              |                        | 114                        |                             | 84                |                            |
|                      | 1602                   | 21.3              |                        | 115                        |                             | 81                |                            |
| DH(V)350-1270-22.5   | 1016                   | 25.6              | 1450                   | 90                         | 110                         | 79                | 6.7                        |
|                      | 1270                   | 22.5              |                        | 95                         |                             | 82                |                            |
|                      | 1524                   | 17.5              |                        | 93                         |                             | 78                |                            |
| DH(V)350-1188-17.8   | 950                    | 21.5              | 1450                   | 74                         | 90                          | 75.5              | 6.7                        |
|                      | 1188                   | 17.8              |                        | 74                         |                             | 78                |                            |
|                      | 1397                   | 13.7              |                        | 71                         |                             | 74                |                            |
| DH(V)350-2743-43.5-O | 2194                   | 49.5              | 1450                   | 353                        | 400                         | 84                | 12.2                       |
|                      | 2743                   | 43.5              |                        | 371                        |                             | 87.5              |                            |
|                      | 3292                   | 35                |                        | 371                        |                             | 84.7              |                            |
| DH(V)350-2635-35     | 2108                   | 41.5              | 1450                   | 291                        | 315                         | 82                | 12.5                       |
|                      | 2635                   | 35                |                        | 294                        |                             | 85.5              |                            |
|                      | 3162                   | 27                |                        | 281                        |                             | 82.8              |                            |
| DH(V)350-2563-27.5   | 2050                   | 33                | 1450                   | 231                        | 250                         | 80                | 13.1                       |
|                      | 2563                   | 27.5              |                        | 229                        |                             | 84                |                            |
|                      | 3076                   | 20                |                        | 210                        |                             | 80                |                            |
| DH(V)350-2484-21.5   | 1987                   | 27                | 1450                   | 187                        | 200                         | 78                | 13.7                       |
|                      | 2484                   | 21.5              |                        | 180                        |                             | 81                |                            |
|                      | 2981                   | 15                |                        | 160                        |                             | 76.3              |                            |
| DH(V)350-2232-42.5-O | 1786                   | 48                | 1450                   | 277                        | 315                         | 84.2              | 9                          |
|                      | 2232                   | 42.5              |                        | 299                        |                             | 86.5              |                            |
|                      | 2678                   | 35                |                        | 303                        |                             | 84.2              |                            |
| DH(V)350-2088-36     | 1670                   | 42.5              | 1450                   | 237                        | 250                         | 81.5              | 9                          |
|                      | 2088                   | 36                |                        | 242                        |                             | 84.5              |                            |
|                      | 2506                   | 28.8              |                        | 240                        |                             | 82                |                            |
| DH(V)350-1987-30     | 1590                   | 35                | 1450                   | 193                        | 220                         | 78.5              | 9.9                        |
|                      | 1987                   | 30                |                        | 198                        |                             | 82                |                            |
|                      | 2384                   | 23.5              |                        | 195                        |                             | 78.2              |                            |
| DH(V)350-1858-25     | 1486                   | 30                | 1450                   | 160                        | 200                         | 76                | 9.9                        |
|                      | 1858                   | 25                |                        | 161                        |                             | 78.5              |                            |
|                      | 2230                   | 18.5              |                        | 148                        |                             | 76                |                            |
| DH(V)350-2610-70-O   | 2088                   | 80                | 1450                   | 529                        | 630                         | 86                | 10                         |
|                      | 2610                   | 70                |                        | 562                        |                             | 88.5              |                            |
|                      | 3132                   | 60                |                        | 605                        |                             | 84.7              |                            |
| DH(V)350-2430-60     | 1944                   | 68                | 1450                   | 426                        | 500                         | 84.5              | 10.7                       |
|                      | 2430                   | 60                |                        | 456                        |                             | 87                |                            |
|                      | 2916                   | 50                |                        | 473                        |                             | 84                |                            |
| DH(V)350-2232-50     | 1786                   | 57.5              | 1450                   | 345                        | 400                         | 81                | 11                         |
|                      | 2232                   | 50                |                        | 353                        |                             | 86                |                            |
|                      | 2678                   | 40                |                        | 360                        |                             | 81                |                            |
| DH(V)350-2070-38     | 1656                   | 45                | 1450                   | 267                        | 280                         | 76                | 11.5                       |
|                      | 2070                   | 38                |                        | 271                        |                             | 79                |                            |
|                      | 2484                   | 30                |                        | 264                        |                             | 77                |                            |
| DH(V)350-2448-67-O   | 1958                   | 76                | 1450                   | 466                        | 560                         | 87                | 9.9                        |
|                      | 2448                   | 67                |                        | 508                        |                             | 88                |                            |
|                      | 2938                   | 57                |                        | 531                        |                             | 86                |                            |
| DH(V)350-2268-59.5   | 1814                   | 67.5              | 1450                   | 393                        | 450                         | 85                | 10.2                       |
|                      | 2268                   | 59.5              |                        | 422                        |                             | 87                |                            |
|                      | 2722                   | 50                |                        | 436                        |                             | 85                |                            |
| DH(V)350-2088-50     | 1670                   | 58                | 1450                   | 320                        | 400                         | 82.5              | 10.4                       |
|                      | 2088                   | 50                |                        | 335                        |                             | 85                |                            |
|                      | 2506                   | 41.5              |                        | 344                        |                             | 82.5              |                            |
| DH(V)350-1944-41.5   | 1555                   | 47.5              | 1450                   | 258                        | 280                         | 78                | 10.7                       |
|                      | 1944                   | 41.5              |                        | 265                        |                             | 83                |                            |
|                      | 2333                   | 34.5              |                        | 274                        |                             | 80                |                            |



## 性能参数 Performance parameters

| 型号<br>Type         | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|--------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                    |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH(V)350-3795-90-O | 3036                   | 100               | 1450                   | 956                        | 1250                        | 86.5              | 9.9                        |
|                    | 3795                   | 90                |                        | 1046                       |                             | 89                |                            |
|                    | 4500                   | 78                |                        | 1139                       |                             | 84                |                            |
| DH(V)350-3543-77.2 | 2834                   | 88                | 1450                   | 800                        | 1000                        | 85.1              | 10.7                       |
|                    | 3543                   | 77.2              |                        | 857                        |                             | 87                |                            |
|                    | 4162                   | 66                |                        | 891                        |                             | 84                |                            |
| DH(V)350-3255-64.3 | 2604                   | 74                | 1450                   | 648                        | 710                         | 81                | 11                         |
|                    | 3255                   | 64.3              |                        | 663                        |                             | 86                |                            |
|                    | 3906                   | 53                |                        | 688                        |                             | 82                |                            |
| DH(V)350-3020-48.9 | 2556                   | 56                | 1450                   | 497                        | 560                         | 78.5              | 11.5                       |
|                    | 3020                   | 48.9              |                        | 509                        |                             | 79                |                            |
|                    | 3623                   | 40.6              |                        | 517                        |                             | 77.5              |                            |
| DH350-2200-125-O   | 1320                   | 139               | 1450                   | 657                        | 1000                        | 76                | 7                          |
|                    | 2200                   | 125               |                        | 881                        |                             | 85                |                            |
|                    | 2640                   | 111               |                        | 985                        |                             | 81                |                            |
| DH350-2100-116     | 1200                   | 129               | 1450                   | 552                        | 900                         | 76                | 6.5                        |
|                    | 2100                   | 116               |                        | 743                        |                             | 85                |                            |
|                    | 2500                   | 104               |                        | 874                        |                             | 81                |                            |
| DH350-1900-107     | 1130                   | 118               | 1450                   | 478                        | 800                         | 76                | 5.8                        |
|                    | 1900                   | 107               |                        | 651                        |                             | 85                |                            |
|                    | 2350                   | 93                |                        | 721                        |                             | 82.5              |                            |
| DH350-1830-94      | 1100                   | 108               | 1450                   | 426                        | 630                         | 76                | 5.5                        |
|                    | 1830                   | 94                |                        | 566                        |                             | 84                |                            |
|                    | 2300                   | 80                |                        | 618                        |                             | 81                |                            |
| DH350-1700-83      | 1020                   | 94                | 1450                   | 343                        | 560                         | 76                | 5.2                        |
|                    | 1700                   | 83                |                        | 457                        |                             | 84                |                            |
|                    | 2150                   | 69                |                        | 518                        |                             | 78                |                            |
| DH400-2630-86-O    | 1570                   | 98.5              | 1450                   | 550                        | 800                         | 76.5              | 7                          |
|                    | 2630                   | 86                |                        | 724                        | 900                         | 85                |                            |
|                    | 3420                   | 70                |                        | 825                        |                             | 79                |                            |
| DH400-2500-79.5    | 1500                   | 91                | 1450                   | 489                        | 710                         | 76                | 6.5                        |
|                    | 2500                   | 79.5              |                        | 637                        | 800                         | 85                |                            |
|                    | 3250                   | 64                |                        | 717                        |                             | 79                |                            |
| DH400-2400-72      | 1440                   | 83                | 1450                   | 434                        | 630                         | 75                | 6                          |
|                    | 2400                   | 72                |                        | 553                        |                             | 85                |                            |
|                    | 3120                   | 57                |                        | 612                        |                             | 79                |                            |
| DH400-2305-64      | 1380                   | 76                | 1450                   | 381                        | 560                         | 75                | 5.8                        |
|                    | 2305                   | 64                |                        | 478                        |                             | 84                |                            |
|                    | 3000                   | 50                |                        | 517                        |                             | 79                |                            |
| DH400-2210-58      | 1330                   | 69                | 1450                   | 333                        | 500                         | 75                | 5.5                        |
|                    | 2210                   | 58                |                        | 420                        |                             | 83                |                            |
|                    | 2880                   | 44                |                        | 442                        |                             | 78                |                            |
| DH400-2200-63.5-O  | 1320                   | 77                | 1450                   | 364                        | 500                         | 76                | 5.6                        |
|                    | 2200                   | 63.5              |                        | 442                        |                             | 86                |                            |
|                    | 2860                   | 48                |                        | 473                        |                             | 79                |                            |
| DH400-2100-57      | 1260                   | 69.5              | 1450                   | 314                        | 450                         | 76                | 5.5                        |
|                    | 2100                   | 57                |                        | 383                        |                             | 85                |                            |
|                    | 2730                   | 41.5              |                        | 395                        |                             | 78                |                            |
| DH400-1990-49.5    | 1200                   | 53.6              | 1450                   | 231                        | 355                         | 76                | 5.2                        |
|                    | 1990                   | 49.5              |                        | 321                        |                             | 83.5              |                            |
|                    | 2500                   | 37                |                        | 327                        |                             | 77                |                            |
| DH400-1850-43      | 1110                   | 54                | 1450                   | 218                        | 315                         | 75                | 5                          |
|                    | 1850                   | 43                |                        | 261                        |                             | 83                |                            |
|                    | 2340                   | 33                |                        | 277                        |                             | 76                |                            |
| DH400-3150-113-O   | 1890                   | 129.5             | 1450                   | 877                        | 1250                        | 76                | 7.5                        |
|                    | 3150                   | 113               |                        | 1127                       | 1400                        | 86                |                            |
|                    | 4100                   | 93                |                        | 1250                       |                             | 83                |                            |
| DH400-3020-103     | 1800                   | 119               | 1450                   | 767                        | 1120                        | 76                | 7                          |
|                    | 3020                   | 103               |                        | 987                        |                             | 85.8              |                            |
|                    | 3920                   | 83                |                        | 1080                       |                             | 82                |                            |
| DH400-2895-92      | 1740                   | 109               | 1450                   | 679                        | 1120                        | 76                | 6.7                        |
|                    | 2895                   | 92                |                        | 847                        |                             | 85.6              |                            |
|                    | 3760                   | 87                |                        | 1060                       |                             | 84                |                            |
| DH400-2760-83      | 1650                   | 99                | 1450                   | 577                        | 800                         | 77                | 6                          |
|                    | 2760                   | 83                |                        | 729                        |                             | 85.5              |                            |
|                    | 3550                   | 64                |                        | 773                        |                             | 80                |                            |
| DH400-2630-72      | 1580                   | 89                | 1450                   | 491                        | 710                         | 78                | 5.7                        |
|                    | 2630                   | 72                |                        | 603                        |                             | 85.5              |                            |
|                    | 3050                   | 61.5              |                        | 625                        |                             | 82                |                            |

## 性能参数 Performance parameters

| 型号<br>Type        | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|-------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                   |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH400-2485-90-O   | 1500                   | 101.5             | 1450                   | 545                        | 800                         | 76                | 6.8                        |
|                   | 2485                   | 90                |                        | 708                        |                             | 86                |                            |
|                   | 3150                   | 72                |                        | 792                        |                             | 78                |                            |
| DH400-2310-82     | 1440                   | 94                | 1450                   | 485                        | 710                         | 76                | 6.5                        |
|                   | 2310                   | 82                |                        | 624                        |                             | 85.8              |                            |
|                   | 2845                   | 66                |                        | 696                        |                             | 78                |                            |
| DH400-2310-74.5   | 1440                   | 79                | 1450                   | 409                        | 630                         | 75.8              | 5.5                        |
|                   | 2310                   | 74.5              |                        | 547                        |                             | 85.7              |                            |
|                   | 2845                   | 60                |                        | 596                        |                             | 78                |                            |
| DH400-2220-67.5   | 1330                   | 79.8              | 1450                   | 385                        | 560                         | 75                | 6.3                        |
|                   | 2220                   | 67.5              |                        | 480                        |                             | 85                |                            |
|                   | 2700                   | 54                |                        | 515                        |                             | 77                |                            |
| DH400-2110-60     | 1265                   | 70.5              | 1450                   | 328                        | 500                         | 74                | 6                          |
|                   | 2110                   | 60                |                        | 405                        |                             | 85                |                            |
|                   | 2520                   | 49.8              |                        | 444                        |                             | 77                |                            |
| DH500-3240-25-O   | 1945                   | 33                | 960                    | 239                        | 280                         | 73                | 5.5                        |
|                   | 3240                   | 25                |                        | 253                        |                             | 87                |                            |
|                   | 3925                   | 18                |                        | 241                        |                             | 80                |                            |
| DH500-3095-23     | 1855                   | 31                | 960                    | 217                        | 250                         | 72                | 4.5                        |
|                   | 3095                   | 23                |                        | 223                        |                             | 87                |                            |
|                   | 3800                   | 16.5              |                        | 213                        |                             | 80                |                            |
| DH500-2975-21     | 1785                   | 28.5              | 960                    | 192                        | 220                         | 72                | 4                          |
|                   | 2975                   | 21                |                        | 196                        |                             | 87                |                            |
|                   | 3650                   | 14.3              |                        | 180                        |                             | 79                |                            |
| DH500-2800-18.5   | 1680                   | 23.2              | 960                    | 147                        | 200                         | 72                | 4                          |
|                   | 2800                   | 18.5              |                        | 162                        |                             | 87                |                            |
|                   | 3420                   | 13                |                        | 155                        |                             | 78                |                            |
| DH500-2670-16.5   | 1600                   | 24                | 960                    | 149                        | 160                         | 70                | 3.6                        |
|                   | 2670                   | 16.5              |                        | 139                        |                             | 86                |                            |
|                   | 3150                   | 12                |                        | 134                        |                             | 77                |                            |
| DH500-2775-22.5-O | 1465                   | 31.3              | 960                    | 176                        | 220                         | 71                | 4.8                        |
|                   | 2775                   | 22.5              |                        | 197                        |                             | 86                |                            |
|                   | 3600                   | 14                |                        | 174                        |                             | 79                |                            |
| DH500-2638-19.5   | 1465                   | 27.5              | 960                    | 155                        | 200                         | 71                | 4                          |
|                   | 2638                   | 19.5              |                        | 163                        |                             | 86                |                            |
|                   | 3430                   | 12                |                        | 142                        |                             | 79                |                            |
| DH500-2450-15.8   | 1505                   | 21.8              | 960                    | 126                        | 160                         | 71                | 4                          |
|                   | 2450                   | 15.8              |                        | 123                        |                             | 85.5              |                            |
|                   | 3185                   | 9.3               |                        | 104                        |                             | 78                |                            |
| DH500-2280-13.2   | 1365                   | 17.5              | 960                    | 94.2                       | 132                         | 69                | 4                          |
|                   | 2280                   | 13.2              |                        | 97.5                       |                             | 84                |                            |
|                   | 2965                   | 8                 |                        | 83.9                       |                             | 77                |                            |
| DH500-3528-41.5-O | 1875                   | 52.5              | 960                    | 372                        | 500                         | 72                | 6                          |
|                   | 3528                   | 41.5              |                        | 450                        |                             | 88.5              |                            |
|                   | 4500                   | 30                |                        | 454                        |                             | 81                |                            |
| DH500-3340-38.7   | 1800                   | 50                | 960                    | 340                        | 450                         | 72                | 5                          |
|                   | 3340                   | 38.7              |                        | 400                        |                             | 88                |                            |
|                   | 4210                   | 28.5              |                        | 398                        |                             | 82                |                            |
| DH500-3170-36     | 1710                   | 46.5              | 960                    | 301                        | 400                         | 72                | 5                          |
|                   | 3170                   | 36                |                        | 353                        |                             | 88                |                            |
|                   | 4030                   | 26.5              |                        | 359                        |                             | 81                |                            |
| DH500-3020-33.2   | 1620                   | 42.5              | 960                    | 260                        | 355                         | 72                | 4.7                        |
|                   | 3020                   | 33.2              |                        | 312                        |                             | 87.5              |                            |
|                   | 3830                   | 25                |                        | 318                        |                             | 82                |                            |
| DH500-2800-29.8   | 1530                   | 37.5              | 960                    | 217                        | 315                         | 72                | 4.5                        |
|                   | 2800                   | 29.8              |                        | 261                        |                             | 87                |                            |
|                   | 3600                   | 22                |                        | 270                        |                             | 80                |                            |
| DH500-2990-34-O   | 1800                   | 42                | 960                    | 267                        | 355                         | 77                | 5                          |
|                   | 2990                   | 34                |                        | 318                        |                             | 87                |                            |
|                   | 3885                   | 23                |                        | 316                        |                             | 77                |                            |
| DH500-2835-30.2   | 1700                   | 38                | 960                    | 231                        | 315                         | 76                | 4.5                        |
|                   | 2835                   | 30.2              |                        | 271                        |                             | 86                |                            |
|                   | 3685                   | 21                |                        | 277                        |                             | 76                |                            |
| DH500-2730-27.8   | 1640                   | 33.8              | 960                    | 201                        | 280                         | 75                | 4.3                        |
|                   | 2730                   | 27.8              |                        | 240                        |                             | 86                |                            |
|                   | 3510                   | 18.5              |                        | 236                        |                             | 75                |                            |
| DH500-2575-24     | 1545                   | 20.6              | 960                    | 167                        | 250                         | 74.5              | 4                          |
|                   | 2575                   | 24                |                        | 198                        |                             | 85                |                            |
|                   | 3280                   | 18                |                        | 216                        |                             | 74.5              |                            |





## 性能参数 Performance parameters

| 型号<br>Type        | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|-------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                   |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH500-3850-65-O   | 2270                   | 73                | 1450                   | 586                        | 900                         | 77                | 6                          |
|                   | 3850                   | 65                |                        | 770                        | 1000                        | 88.5              |                            |
|                   | 5040                   | 54                |                        | 926                        |                             | 80                |                            |
| DH500-3670-59.5   | 2200                   | 67.5              | 1450                   | 525                        | 800                         | 77                | 5.2                        |
|                   | 3670                   | 59.5              |                        | 675                        |                             | 88                |                            |
|                   | 4770                   | 48                |                        | 789                        |                             | 79                |                            |
| DH500-3420-53     | 2050                   | 61                | 1450                   | 448                        | 710                         | 76                | 5                          |
|                   | 3420                   | 53                |                        | 567                        |                             | 87                |                            |
|                   | 4350                   | 42.5              |                        | 645                        |                             | 78                |                            |
| DH500-3200-47.8   | 1920                   | 55.7              | 1450                   | 388                        | 560                         | 75                | 4.5                        |
|                   | 3200                   | 47.8              |                        | 484                        |                             | 86                |                            |
|                   | 3960                   | 39                |                        | 546                        |                             | 77                |                            |
| DH500-3020-42     | 1810                   | 50                | 1450                   | 333                        | 500                         | 74                | 4.5                        |
|                   | 3020                   | 42                |                        | 406                        |                             | 85                |                            |
|                   | 3560                   | 35                |                        | 446                        |                             | 76                |                            |
| DH500-3005-49-O   | 1800                   | 60                | 960                    | 392                        | 560                         | 75                | 6                          |
|                   | 3005                   | 49                |                        | 461                        |                             | 87                |                            |
|                   | 3905                   | 35                |                        | 496                        |                             | 75                |                            |
| DH500-2800-44.2   | 1680                   | 53.5              | 960                    | 331                        | 450                         | 74                | 5                          |
|                   | 2800                   | 44.2              |                        | 392                        |                             | 86                |                            |
|                   | 3640                   | 32.5              |                        | 429                        |                             | 75                |                            |
| DH500-2640-39.4   | 1600                   | 47.5              | 960                    | 284                        | 400                         | 73                | 4.3                        |
|                   | 2640                   | 39.4              |                        | 333                        |                             | 85                |                            |
|                   | 3360                   | 29.2              |                        | 361                        |                             | 74                |                            |
| DH500-2410-34.5   | 1450                   | 41.4              | 960                    | 227                        | 355                         | 72                | 4                          |
|                   | 2410                   | 34.5              |                        | 269                        |                             | 84                |                            |
|                   | 3132                   | 26.5              |                        | 305                        |                             | 74                |                            |
| DH500-3960-80-O   | 2580                   | 88.5              | 960                    | 787                        | 1120                        | 79                | 7.1                        |
|                   | 3960                   | 80                |                        | 969                        | 1250                        | 89                |                            |
|                   | 5150                   | 68                |                        | 1163                       |                             | 82                |                            |
| DH500-3600-72.8   | 2160                   | 80                | 960                    | 603                        | 900                         | 78                | 6                          |
|                   | 3600                   | 72.8              |                        | 811                        | 1120                        | 88                |                            |
|                   | 4680                   | 62                |                        | 975                        |                             | 81                |                            |
| DH500-3220-65.5   | 1930                   | 71                | 960                    | 484                        | 800                         | 77                | 5                          |
|                   | 3220                   | 65.5              |                        | 660                        |                             | 87                |                            |
|                   | 4100                   | 57                |                        | 795                        |                             | 80                |                            |
| DH500-2850-58     | 1710                   | 62                | 960                    | 380                        | 630                         | 76                | 4.5                        |
|                   | 2850                   | 58                |                        | 523                        | 710                         | 86                |                            |
|                   | 3600                   | 51.8              |                        | 643                        |                             | 79                |                            |
| DH500-3492-62.5-O | 2375                   | 70.8              | 960                    | 572                        | 800                         | 80                | 5.8                        |
|                   | 3492                   | 62.5              |                        | 675                        |                             | 88                |                            |
|                   | 4550                   | 48                |                        | 793                        |                             | 75                |                            |
| DH500-3330-56     | 2000                   | 64                | 960                    | 447                        | 710                         | 78                | 5                          |
|                   | 3330                   | 56                |                        | 584                        |                             | 87                |                            |
|                   | 4350                   | 44                |                        | 695                        |                             | 75                |                            |
| DH500-3150-50     | 1900                   | 57                | 960                    | 383                        | 560                         | 77                | 4.5                        |
|                   | 3150                   | 50                |                        | 499                        | 630                         | 86                |                            |
|                   | 4150                   | 39.3              |                        | 600                        |                             | 74                |                            |
| DH500-2970-43.6   | 1780                   | 49                | 960                    | 312                        | 500                         | 76                | 4                          |
|                   | 2970                   | 43.6              |                        | 415                        | 560                         | 85                |                            |
|                   | 3900                   | 36                |                        | 516                        |                             | 74                |                            |
| DH500-4230-112-O  | 2520                   | 124               | 960                    | 1119                       | 1600                        | 76                | 7                          |
|                   | 4230                   | 112               |                        | 1449                       | 1800                        | 89                |                            |
|                   | 5500                   | 95.5              |                        | 1787                       |                             | 80                |                            |
| DH500-4000-100    | 2400                   | 112               | 960                    | 963                        | 1400                        | 76                | 6                          |
|                   | 4000                   | 100               |                        | 1237                       | 1600                        | 88                |                            |
|                   | 5200                   | 86                |                        | 1541                       |                             | 79                |                            |
| DH500-3790-90.5   | 2270                   | 102.5             | 960                    | 845                        | 1250                        | 75                | 6                          |
|                   | 3790                   | 90.5              |                        | 1073                       | 1400                        | 87                |                            |
|                   | 4930                   | 77                |                        | 1325                       |                             | 78                |                            |
| DH500-3550-80.5   | 2150                   | 90                | 960                    | 712                        | 1120                        | 74                | 5.5                        |
|                   | 3550                   | 80.5              |                        | 905                        |                             | 86                |                            |
|                   | 4320                   | 70.5              |                        | 1077                       |                             | 77                |                            |
| DH500-3600-90-O   | 2160                   | 101               | 960                    | 761                        | 1120                        | 78                | 5.9                        |
|                   | 3600                   | 90                |                        | 997                        | 1250                        | 88.5              |                            |
|                   | 4680                   | 73                |                        | 1163                       |                             | 80                |                            |
| DH500-3480-83.5   | 2100                   | 94.7              | 960                    | 703                        | 1000                        | 77                | 5                          |
|                   | 3480                   | 83.5              |                        | 899                        | 1120                        | 88                |                            |
|                   | 4520                   | 68                |                        | 1059                       |                             | 79                |                            |

## 性能参数 Performance parameters

| 型号<br>Type        | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|-------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                   |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH500-3200-77.8   | 1920                   | 88                | 960                    | 634                        | 900                         | 76                | 4.5                        |
|                   | 3200                   | 77.8              |                        | 806                        | 1120                        | 88                |                            |
|                   | 4020                   | 63                |                        | 943                        |                             | 78                |                            |
| DH500-3200-71.5   | 1920                   | 82                | 960                    | 571                        | 800                         | 75                | 4.2                        |
|                   | 3200                   | 71.5              |                        | 716                        | 900                         | 87                |                            |
|                   | 4020                   | 60                |                        | 853                        |                             | 77                |                            |
| DH500-3060-66     | 1840                   | 75                | 960                    | 508                        | 800                         | 74                | 4                          |
|                   | 3060                   | 66                |                        | 639                        |                             | 86                |                            |
|                   | 3780                   | 56                |                        | 758                        |                             | 76                |                            |
| DH600-4680-24.2-O | 2810                   | 33.3              | 960                    | 344                        | 400                         | 74                | 5.9                        |
|                   | 4680                   | 24.2              |                        | 354                        |                             | 87                |                            |
|                   | 6080                   | 14.3              |                        | 316                        |                             | 75                |                            |
| DH600-4430-21.5   | 2660                   | 33.7              | 960                    | 334                        | 355                         | 73                | 5                          |
|                   | 4430                   | 21.5              |                        | 302                        |                             | 86                |                            |
|                   | 5690                   | 13                |                        | 272                        |                             | 74                |                            |
| DH600-4040-17.8   | 2430                   | 25                | 960                    | 230                        | 250                         | 72                | 4.5                        |
|                   | 4040                   | 17.8              |                        | 230                        |                             | 85                |                            |
|                   | 5220                   | 11                |                        | 214                        |                             | 73                |                            |
| DH600-3780-15.5   | 2270                   | 21.5              | 960                    | 187                        | 220                         | 71                | 4.2                        |
|                   | 3780                   | 15.5              |                        | 190                        |                             | 84                |                            |
|                   | 4850                   | 10                |                        | 184                        |                             | 72                |                            |
| DH600-3960-20.3-O | 2370                   | 28.3              | 960                    | 250                        | 315                         | 73                | 6                          |
|                   | 3960                   | 20.3              |                        | 257                        |                             | 85                |                            |
|                   | 4900                   | 13.3              |                        | 240                        |                             | 74                |                            |
| DH600-3750-18     | 2250                   | 28.8              | 960                    | 245                        | 250                         | 72                | 5.8                        |
|                   | 3750                   | 18                |                        | 219                        |                             | 84                |                            |
|                   | 4600                   | 11.5              |                        | 197                        |                             | 73                |                            |
| DH600-3450-15.5   | 2070                   | 22.3              | 960                    | 177                        | 200                         | 71                | 5                          |
|                   | 3450                   | 15.5              |                        | 175                        |                             | 83                |                            |
|                   | 4250                   | 10                |                        | 158                        |                             | 73                |                            |
| DH600-3150-13     | 1890                   | 19.3              | 960                    | 142                        | 160                         | 70                | 4                          |
|                   | 3150                   | 13                |                        | 136                        |                             | 82                |                            |
|                   | 4000                   | 8.5               |                        | 128                        |                             | 72                |                            |
| DH600-4720-39-O   | 2830                   | 48                | 960                    | 493                        | 630                         | 75                | 7.8                        |
|                   | 4720                   | 39                |                        | 569                        |                             | 88                |                            |
|                   | 5940                   | 30                |                        | 599                        |                             | 81                |                            |
| DH600-4420-34     | 2650                   | 42                | 960                    | 404                        | 560                         | 75                | 6.5                        |
|                   | 4420                   | 34                |                        | 470                        |                             | 87                |                            |
|                   | 5580                   | 26                |                        | 494                        |                             | 80                |                            |
| DH600-4080-29     | 2450                   | 36                | 960                    | 324                        | 450                         | 74                | 6                          |
|                   | 4080                   | 29                |                        | 375                        |                             | 86                |                            |
|                   | 5040                   | 23.2              |                        | 398                        |                             | 80                |                            |
| DH600-3750-24.8   | 2250                   | 30                | 960                    | 252                        | 355                         | 73                | 5                          |
|                   | 3750                   | 24.8              |                        | 298                        |                             | 85                |                            |
|                   | 4500                   | 20                |                        | 310                        |                             | 79                |                            |
| DH600-3690-33-O   | 2215                   | 40.5              | 960                    | 326                        | 450                         | 75                | 6                          |
|                   | 3690                   | 33                |                        | 381                        |                             | 87                |                            |
|                   | 4680                   | 25                |                        | 398                        |                             | 80                |                            |
| DH600-3440-29     | 2060                   | 35                | 960                    | 265                        | 355                         | 74                | 5                          |
|                   | 3440                   | 29                |                        | 316                        |                             | 86                |                            |
|                   | 4400                   | 22                |                        | 334                        |                             | 79                |                            |
| DH600-3170-25     | 1900                   | 30                | 960                    | 213                        | 280                         | 73                | 4.7                        |
|                   | 3170                   | 25                |                        | 254                        | 315                         | 85                |                            |
|                   | 3980                   | 20                |                        | 278                        |                             | 78                |                            |
| DH600-2950-21.5   | 1770                   | 26                | 960                    | 174                        | 250                         | 72                | 4.5                        |
|                   | 2950                   | 21.5              |                        | 206                        |                             | 84                |                            |
|                   | 3600                   | 18                |                        | 229                        |                             | 77                |                            |
| DH600-4630-58.5-O | 2780                   | 69                | 960                    | 653                        | 900                         | 80                | 6.5                        |
|                   | 4630                   | 58.5              |                        | 828                        |                             | 89                |                            |
|                   | 6050                   | 43.5              |                        | 896                        |                             | 80                |                            |
| DH600-4320-50     | 2600                   | 60.5              | 960                    | 542                        | 800                         | 79                | 5.5                        |
|                   | 4320                   | 50                |                        | 668                        |                             | 88                |                            |
|                   | 5620                   | 36                |                        | 697                        |                             | 79                |                            |
| DH600-4050-43     | 2430                   | 53                | 960                    | 449                        | 630                         | 78                | 5                          |
|                   | 4050                   | 43                |                        | 545                        |                             | 87                |                            |
|                   | 5220                   | 31                |                        | 565                        |                             | 78                |                            |
| DH600-3780-35     | 2270                   | 45                | 960                    | 361                        | 500                         | 77                | 4.5                        |
|                   | 3780                   | 35                |                        | 419                        |                             | 86                |                            |
|                   | 4680                   | 27                |                        | 447                        |                             | 77                |                            |



## 性能参数 Performance parameters

| 型号<br>Type        | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|-------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                   |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH600-3600-54-O   | 2160                   | 64.5              | 960                    | 486                        | 710                         | 78                | 5.2                        |
|                   | 3600                   | 54                |                        | 601                        |                             | 88                |                            |
|                   | 4680                   | 38                |                        | 621                        |                             | 78                |                            |
| DH600-3310-45.8   | 1990                   | 54.6              | 960                    | 384                        | 560                         | 77                | 5                          |
|                   | 3310                   | 45.8              |                        | 474                        |                             | 87                |                            |
|                   | 4300                   | 33                |                        | 502                        |                             | 77                |                            |
| DH600-3130-40.5   | 1880                   | 48.2              | 960                    | 325                        | 450                         | 76                | 5                          |
|                   | 3130                   | 40.5              |                        | 401                        |                             | 86                |                            |
|                   | 4060                   | 30.5              |                        | 444                        |                             | 76                |                            |
| DH600-2900-35     | 1740                   | 41                | 960                    | 259                        | 400                         | 75                | 5                          |
|                   | 2900                   | 35                |                        | 325                        |                             | 85                |                            |
|                   | 3670                   | 28                |                        | 373                        |                             | 75                |                            |
| DH600-5500-87.5-O | 3300                   | 105               | 960                    | 1194                       | 1600                        | 79                | 8.5                        |
|                   | 5500                   | 87.5              |                        | 1472                       | 1800                        | 89                |                            |
|                   | 6950                   | 70                |                        | 1615                       |                             | 82                |                            |
| DH600-5110-76     | 3060                   | 93                | 960                    | 993                        | 1400                        | 78                | 7                          |
|                   | 5110                   | 76                |                        | 1201                       |                             | 88                |                            |
|                   | 6480                   | 57                |                        | 1183                       |                             | 85                |                            |
| DH600-4680-62     | 2800                   | 82                | 960                    | 812                        | 1120                        | 77                | 6.2                        |
|                   | 4680                   | 62                |                        | 908                        | 1400                        | 87                |                            |
|                   | 5800                   | 57                |                        | 1230                       |                             | 86                |                            |
| DH600-4350-56     | 2610                   | 70                | 960                    | 654                        | 900                         | 76                | 5.8                        |
|                   | 4350                   | 56                |                        | 762                        |                             | 87                |                            |
|                   | 5040                   | 47                |                        | 786                        |                             | 82                |                            |
| DH600-4320-66.2-O | 2600                   | 79                | 960                    | 717                        | 1000                        | 78                | 6                          |
|                   | 4320                   | 66.2              |                        | 885                        |                             | 88                |                            |
|                   | 5620                   | 51                |                        | 979                        |                             | 80                |                            |
| DH600-4100-58     | 2460                   | 71.4              | 960                    | 613                        | 800                         | 78                | 5.4                        |
|                   | 4100                   | 58                |                        | 744                        |                             | 87                |                            |
|                   | 5320                   | 42                |                        | 770                        |                             | 79                |                            |
| DH600-3820-50     | 2300                   | 62.8              | 960                    | 504                        | 710                         | 78                | 5                          |
|                   | 3820                   | 50                |                        | 598                        | 800                         | 87                |                            |
|                   | 4950                   | 48                |                        | 779                        |                             | 83                |                            |
| DH600-3460-42.5   | 2080                   | 55                | 960                    | 404                        | 560                         | 77                | 4.5                        |
|                   | 3460                   | 42.5              |                        | 465                        |                             | 86                |                            |
|                   | 4250                   | 32                |                        | 469                        |                             | 79                |                            |
| DH700-6480-30-O   | 3900                   | 38.8              | 960                    | 549                        | 710                         | 75                | 8                          |
|                   | 6480                   | 30                |                        | 608                        |                             | 87                |                            |
|                   | 8060                   | 22.7              |                        | 623                        |                             | 80                |                            |
| DH700-6300-28     | 3780                   | 35.5              | 960                    | 487                        | 630                         | 75                | 7.5                        |
|                   | 6300                   | 28                |                        | 558                        |                             | 86                |                            |
|                   | 7800                   | 21.2              |                        | 570                        |                             | 79                |                            |
| DH700-6050-26     | 3630                   | 32                | 960                    | 427                        | 560                         | 74                | 7                          |
|                   | 6050                   | 26                |                        | 498                        |                             | 86                |                            |
|                   | 7450                   | 20.9              |                        | 537                        |                             | 79                |                            |
| DH700-5870-24     | 3500                   | 29                | 960                    | 373                        | 500                         | 74                | 7                          |
|                   | 5870                   | 24                |                        | 451                        |                             | 85                |                            |
|                   | 7000                   | 20                |                        | 489                        |                             | 78                |                            |
| DH700-4970-23.7-O | 2980                   | 35.2              | 960                    | 376                        | 400                         | 76                | 6                          |
|                   | 4970                   | 23.7              |                        | 369                        |                             | 87                |                            |
|                   | 6500                   | 10.2              |                        | 237                        |                             | 76                |                            |
| DH700-4750-21.6   | 2850                   | 36                | 960                    | 367                        | 400                         | 76                | 6                          |
|                   | 4750                   | 21.6              |                        | 325                        |                             | 86                |                            |
|                   | 6150                   | 10.5              |                        | 232                        |                             | 76                |                            |
| DH700-4540-20     | 2750                   | 28                | 960                    | 276                        | 315                         | 76                | 5                          |
|                   | 4540                   | 20                |                        | 287                        |                             | 86                |                            |
|                   | 5900                   | 10.5              |                        | 222                        |                             | 76                |                            |
| DH700-4350-18     | 2610                   | 25                | 960                    | 234                        | 280                         | 76                | 4.5                        |
|                   | 4350                   | 18                |                        | 251                        |                             | 85                |                            |
|                   | 5550                   | 10                |                        | 199                        |                             | 76                |                            |
| DH700-6500-44-O   | 3650                   | 58.5              | 960                    | 775                        | 1000                        | 75                | 8                          |
|                   | 6500                   | 44                |                        | 895                        |                             | 87                |                            |
|                   | 8460                   | 28                |                        | 827                        |                             | 78                |                            |
| DH700-6270-40.2   | 3750                   | 53.8              | 960                    | 733                        | 900                         | 75                | 7.7                        |
|                   | 6270                   | 40.2              |                        | 798                        |                             | 86                |                            |
|                   | 8060                   | 26                |                        | 731                        |                             | 78                |                            |
| DH700-5950-37     | 3570                   | 49.5              | 960                    | 650                        | 800                         | 74                | 7.3                        |
|                   | 5950                   | 37                |                        | 697                        |                             | 86                |                            |
|                   | 7560                   | 25.5              |                        | 672                        |                             | 78                |                            |

## 性能参数 Performance parameters

| 型号<br>Type        | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|-------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                   |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH700-5740-34     | 3450                   | 45                | 960                    | 571                        | 680                         | 74                | 7                          |
|                   | 5740                   | 34                |                        | 618                        |                             | 86                |                            |
|                   | 7100                   | 23.8              |                        | 590                        |                             | 78                |                            |
| DH700-5600-39.5-O | 3360                   | 51.5              | 960                    | 637                        | 800                         | 74                | 7                          |
|                   | 5600                   | 39.5              |                        | 700                        |                             | 86                |                            |
|                   | 7280                   | 28                |                        | 711                        |                             | 78                |                            |
| DH700-5300-35     | 3180                   | 45.5              | 960                    | 532                        | 710                         | 74                | 6.5                        |
|                   | 5300                   | 35                |                        | 594                        |                             | 85                |                            |
|                   | 6550                   | 26.5              |                        | 606                        |                             | 78                |                            |
| DH700-5040-31.5   | 3020                   | 41                | 960                    | 455                        | 560                         | 74                | 6                          |
|                   | 5040                   | 31.5              |                        | 508                        |                             | 85                |                            |
|                   | 6200                   | 24.5              |                        | 530                        |                             | 78                |                            |
| DH700-4630-27.5   | 2780                   | 35.8              | 960                    | 371                        | 450                         | 73                | 6                          |
|                   | 4630                   | 27.5              |                        | 413                        |                             | 84                |                            |
|                   | 5760                   | 21                |                        | 428                        |                             | 77                |                            |
| DH700-7380-80-O   | 4430                   | 92                | 960                    | 1387                       | 2000                        | 80                | 8.8                        |
|                   | 7380                   | 80                |                        | 1806                       |                             | 89                |                            |
|                   | 9600                   | 60                |                        | 1912                       |                             | 82                |                            |
| DH700-6960-68     | 4180                   | 82.6              | 960                    | 1175                       | 1600                        | 80                | 8                          |
|                   | 6960                   | 68                |                        | 1464                       |                             | 88                |                            |
|                   | 9050                   | 49                |                        | 1400                       |                             | 81                |                            |
| DH700-6550-58     | 3930                   | 71.5              | 960                    | 968                        | 1400                        | 79                | 7                          |
|                   | 6550                   | 58                |                        | 1189                       |                             | 87                |                            |
|                   | 8430                   | 43                |                        | 1233                       |                             | 80                |                            |
| DH700-6010-48     | 3600                   | 60                | 960                    | 754                        | 1000                        | 78                | 6.3                        |
|                   | 6010                   | 48                |                        | 913                        |                             | 86                |                            |
|                   | 7500                   | 36                |                        | 930                        |                             | 79                |                            |
| DH700-5400-60-O   | 3240                   | 72.8              | 960                    | 834                        | 1120                        | 77                | 6.8                        |
|                   | 5400                   | 60                |                        | 1002                       |                             | 88                |                            |
|                   | 6600                   | 46                |                        | 1020                       |                             | 81                |                            |
| DH700-4950-53.8   | 2970                   | 65                | 960                    | 683                        | 900                         | 77                | 6                          |
|                   | 4950                   | 53.8              |                        | 833                        |                             | 87                |                            |
|                   | 5900                   | 42                |                        | 843                        |                             | 80                |                            |
| DH700-4400-47     | 2640                   | 56.6              | 960                    | 535                        | 710                         | 76                | 5.5                        |
|                   | 4400                   | 47                |                        | 655                        |                             | 86                |                            |
|                   | 5260                   | 39                |                        | 698                        |                             | 80                |                            |
| DH700-3900-41.5   | 2340                   | 49                | 960                    | 416                        | 630                         | 75                | 5                          |
|                   | 3900                   | 41.5              |                        | 518                        |                             | 85                |                            |
|                   | 4620                   | 35.5              |                        | 565                        |                             | 79                |                            |
| DH800-9000-27-O   | 5400                   | 37.8              | 725                    | 751                        | 800                         | 74                | 7                          |
|                   | 9000                   | 27                |                        | 760                        |                             | 87                |                            |
|                   | 11000                  | 18.2              |                        | 681                        |                             | 80                |                            |
| DH800-8640-24.3   | 5200                   | 34.5              | 725                    | 660                        | 710                         | 74                | 6.3                        |
|                   | 8640                   | 24.3              |                        | 665                        |                             | 86                |                            |
|                   | 10300                  | 16.5              |                        | 589                        |                             | 79                |                            |
| DH800-8280-22.3   | 4970                   | 31.6              | 725                    | 578                        | 630                         | 74                | 6                          |
|                   | 8280                   | 22.3              |                        | 584                        |                             | 86                |                            |
|                   | 9850                   | 14.8              |                        | 502                        |                             | 79                |                            |
| DH800-7850-20     | 4700                   | 29                | 725                    | 501                        | 560                         | 74                | 5.5                        |
|                   | 7850                   | 20                |                        | 497                        |                             | 86                |                            |
|                   | 9200                   | 14                |                        | 444                        |                             | 79                |                            |
| DH800-7270-22.2-O | 4360                   | 30.8              | 725                    | 487                        | 560                         | 75                | 7.2                        |
|                   | 7270                   | 22.2              |                        | 511                        |                             | 86                |                            |
|                   | 9150                   | 13                |                        | 432                        |                             | 75                |                            |
| DH800-6950-20.6   | 4170                   | 28.6              | 725                    | 433                        | 500                         | 75                | 7                          |
|                   | 6950                   | 20.6              |                        | 459                        |                             | 85                |                            |
|                   | 8720                   | 12.5              |                        | 396                        |                             | 75                |                            |
| DH800-6600-18.5   | 3960                   | 26                | 725                    | 379                        | 450                         | 74                | 6                          |
|                   | 6600                   | 18.5              |                        | 396                        |                             | 84                |                            |
|                   | 8250                   | 11.4              |                        | 346                        |                             | 74                |                            |
| DH800-6260-16.5   | 3760                   | 23.8              | 725                    | 334                        | 400                         | 73                | 6                          |
|                   | 6260                   | 16.5              |                        | 335                        |                             | 84                |                            |
|                   | 7700                   | 10.5              |                        | 297                        |                             | 74                |                            |
| DH800-9000-46-O   | 5400                   | 56.4              | 725                    | 1063                       | 1400                        | 78                | 6.3                        |
|                   | 9000                   | 46                |                        | 1281                       |                             | 88                |                            |
|                   | 11700                  | 34.5              |                        | 1391                       |                             | 79                |                            |
| DH800-8650-42.3   | 5200                   | 52.2              | 725                    | 947                        | 1250                        | 78                | 6                          |
|                   | 8650                   | 42.3              |                        | 1145                       |                             | 87                |                            |
|                   | 11160                  | 32                |                        | 1231                       |                             | 79                |                            |



## 性能参数 Performance parameters

| 型号<br>Type        | 流量<br>Capacity<br>m³/h | 扬程<br>Head<br>(m) | 转速<br>Speed<br>(r/min) | 功率<br>Power                |                             | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>NPSHr<br>(m) |
|-------------------|------------------------|-------------------|------------------------|----------------------------|-----------------------------|-------------------|----------------------------|
|                   |                        |                   |                        | 轴功率<br>Shaft power<br>(kW) | 电机功率<br>Motor power<br>(kW) |                   |                            |
| DH800-8260-38.5   | 4960                   | 47.5              | 725                    | 833                        | 1120                        | 77                | 5.5                        |
|                   | 8260                   | 38.5              |                        | 1007                       |                             | 86                |                            |
|                   | 10600                  | 30                |                        | 1096                       |                             | 79                |                            |
| DH800-7850-35.4   | 4710                   | 43                | 725                    | 725                        | 1000                        | 76                | 5.3                        |
|                   | 7850                   | 35.4              |                        | 880                        |                             | 86                |                            |
|                   | 10200                  | 26.8              |                        | 954                        |                             | 78                |                            |
| DH800-7450-32.2   | 4470                   | 38.5              | 725                    | 625                        | 900                         | 75                | 5                          |
|                   | 7450                   | 32.2              |                        | 768                        |                             | 85                |                            |
|                   | 9700                   | 24.3              |                        | 833                        |                             | 77                |                            |
| DH800-7500-43-O   | 4500                   | 53                | 725                    | 854                        | 1120                        | 76                | 6                          |
|                   | 7500                   | 43                |                        | 1009                       |                             | 87                |                            |
|                   | 9750                   | 31.3              |                        | 1093                       |                             | 76                |                            |
| DH800-7150-39     | 4300                   | 47.5              | 725                    | 741                        | 1000                        | 75                | 5.2                        |
|                   | 7150                   | 39                |                        | 883                        |                             | 86                |                            |
|                   | 9180                   | 28                |                        | 933                        |                             | 75                |                            |
| DH800-6800-34.8   | 4080                   | 43                | 725                    | 637                        | 900                         | 75                | 4.5                        |
|                   | 6800                   | 34.8              |                        | 758                        |                             | 85                |                            |
|                   | 8850                   | 23.8              |                        | 765                        |                             | 75                |                            |
| DH800-6430-30.7   | 3860                   | 38.5              | 725                    | 547                        | 710                         | 74                | 4.2                        |
|                   | 6430                   | 30.7              |                        | 640                        |                             | 84                |                            |
|                   | 8280                   | 20                |                        | 601                        |                             | 75                |                            |
| DH800-6050-26.8   | 3630                   | 33.5              | 725                    | 453                        | 630                         | 73                | 4                          |
|                   | 6050                   | 26.8              |                        | 532                        |                             | 83                |                            |
|                   | 7860                   | 16.8              |                        | 486                        |                             | 74                |                            |
| DH800-9800-62.5-O | 5880                   | 75.5              | 725                    | 1530                       | 2000                        | 79                | 7.1                        |
|                   | 9800                   | 62.5              |                        | 1873                       |                             | 89                |                            |
|                   | 11600                  | 51.2              |                        | 1902                       |                             | 85                |                            |
| DH800-9300-55     | 5580                   | 67.5              | 725                    | 1298                       | 1800                        | 79                | 6                          |
|                   | 9300                   | 55                |                        | 1565                       |                             | 89                |                            |
|                   | 11000                  | 45.2              |                        | 1611                       |                             | 84                |                            |
| DH800-8890-49.5   | 5300                   | 61.5              | 725                    | 1123                       | 1600                        | 79                | 5.5                        |
|                   | 8890                   | 49.5              |                        | 1361                       |                             | 88                |                            |
|                   | 10400                  | 41.3              |                        | 1409                       |                             | 83                |                            |
| DH800-8500-44.5   | 5100                   | 55.5              | 725                    | 988                        | 1400                        | 78                | 5                          |
|                   | 8500                   | 44.5              |                        | 1184                       |                             | 87                |                            |
|                   | 9650                   | 38                |                        | 1203                       |                             | 83                |                            |
| DH800-8000-52-O   | 4800                   | 63                | 725                    | 1029                       | 1400                        | 80                | 6.8                        |
|                   | 8000                   | 52                |                        | 1272                       |                             | 89                |                            |
|                   | 10450                  | 39                |                        | 1337                       |                             | 83                |                            |
| DH800-7650-47.8   | 4600                   | 58.3              | 725                    | 924                        | 1250                        | 79                | 5                          |
|                   | 7650                   | 47.8              |                        | 1131                       |                             | 88                |                            |
|                   | 9950                   | 35.3              |                        | 1166                       |                             | 82                |                            |
| DH800-7240-43.2   | 4350                   | 53.2              | 725                    | 797                        | 1250                        | 79                | 5                          |
|                   | 7240                   | 43.2              |                        | 968                        |                             | 88                |                            |
|                   | 9500                   | 30.5              |                        | 998                        |                             | 79                |                            |
| DH800-6840-39     | 4100                   | 48                | 725                    | 687                        | 1000                        | 78                | 4.5                        |
|                   | 6840                   | 39                |                        | 835                        |                             | 87                |                            |
|                   | 8820                   | 28                |                        | 862                        |                             | 78                |                            |
| DH800-6400-35     | 3840                   | 44                | 725                    | 597                        | 800                         | 77                | 4                          |
|                   | 6400                   | 35                |                        | 709                        |                             | 86                |                            |
|                   | 8250                   | 25                |                        | 729                        |                             | 77                |                            |

如蒙洽询请指示下列各项：  
For further details, please fulfill the chart below:

客户 \_\_\_\_\_ 承办人员 \_\_\_\_\_  
Customer \_\_\_\_\_ Undertaker \_\_\_\_\_

工程名称 \_\_\_\_\_ 工程地点 \_\_\_\_\_  
Name of project \_\_\_\_\_ Address of project \_\_\_\_\_

电话 \_\_\_\_\_ 传真 \_\_\_\_\_  
Telephone \_\_\_\_\_ Fax \_\_\_\_\_

订购机型 \_\_\_\_\_ 订购数量 \_\_\_\_\_  
Type \_\_\_\_\_ Quantity \_\_\_\_\_

|                                |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                            |                                |                                  |                                      |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------------------|--------------------------------------|
| 性能参数<br>Performance parameters | 介质名称<br>Medium name                                                                                                                                                                                                                                             |                                                                                                                                                                                                                            |                                | * 介质温度(°C)<br>Medium temperature |                                      |
|                                | * 流量(m³/h)<br>Capacity                                                                                                                                                                                                                                          |                                                                                                                                                                                                                            |                                | * 扬程(m)<br>Head                  |                                      |
|                                | * 进口压力(MPa)<br>Inlet pressure                                                                                                                                                                                                                                   |                                                                                                                                                                                                                            |                                |                                  |                                      |
|                                | 轴封型式<br>Seal form                                                                                                                                                                                                                                               | <input type="checkbox"/> 机械密封 (标准配置)<br>Mechanical seal(standard) <input type="checkbox"/> 其他<br>Other _____                                                                                                               |                                |                                  |                                      |
|                                | 主要部件材质<br>Major parts' material                                                                                                                                                                                                                                 | 泵体<br>Pump body                                                                                                                                                                                                            | <input type="checkbox"/> HT250 | 标准配置<br>Standard                 | <input type="checkbox"/> 其他<br>Other |
|                                |                                                                                                                                                                                                                                                                 | 叶轮<br>Impeller                                                                                                                                                                                                             | <input type="checkbox"/> HT250 | 标准配置<br>Standard                 | <input type="checkbox"/> 其他<br>Other |
|                                |                                                                                                                                                                                                                                                                 | 轴<br>Shaft                                                                                                                                                                                                                 | <input type="checkbox"/> 2Cr13 | 标准配置<br>Standard                 | <input type="checkbox"/> 其他<br>Other |
|                                | 泵安装型式<br>Installation type                                                                                                                                                                                                                                      | <input type="checkbox"/> 从传动端看泵方向为顺时针方向旋转(标准配置)<br>Clockwise rotation looking from motor to pump body(standard).<br><input type="checkbox"/> 从传动端看泵方向为逆时针方向旋转<br>Anti-clock wise rotation looking from motor to pump body. |                                |                                  |                                      |
|                                | 电源<br>Power                                                                                                                                                                                                                                                     | 电压(V)<br>Voltage                                                                                                                                                                                                           |                                | 频率(Hz)<br>Frequency              |                                      |
|                                | 电机<br>Moter                                                                                                                                                                                                                                                     | 型号<br>Type                                                                                                                                                                                                                 |                                | 功率(kW)<br>Power                  |                                      |
| 防护等级<br>IP code                |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                            | 绝缘要求<br>Class of insulation    |                                  |                                      |
| 其他要求<br>Other requirement      |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                            |                                |                                  |                                      |
| 备注<br>Notes                    | 1. 出厂标准配置不含地脚螺栓和吸入、吐出锥管。<br>The foundation bolt and discharge cone are not in the ex-factory standard layout.<br>2. 以上资料请尽可能填写完整, 以便于选择最佳机型, 项目前加注“*”者, 请务必填写。<br>Please fill in the parameter lists as complete as possible. The item with “*” must be filled. |                                                                                                                                                                                                                            |                                |                                  |                                      |



欢迎索取以下产品型录

To find out more about following products, please visit [www.gsd.net.cn](http://www.gsd.net.cn)

|                                                                                     |                                                                 |                                                                                                                                                    |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <b>泵系列</b><br>Pump Series                                       | 潜水泵系列   陆上泵系列   特种泵系列<br>Submersible pump series   On land pump series   Special pump series                                                       |
|    | <b>搅拌推流系列</b><br>Mixing and flow propeller                      | 搅拌机系列   推流器系列<br>Mixing series   Flow propeller series                                                                                             |
|    | <b>供氧曝气系列</b><br>Aeration equipment series                      | 曝气机系列   曝气盘系列   曝气管系列<br>Aerator series   Disc diffusers   Tube diffusers                                                                          |
|    | <b>风机系列</b><br>Blower Series                                    | 磁悬浮鼓风机   空气悬浮鼓风机   三叶罗茨鼓风机系列<br>Maglev turbo blower   Turbo blower   Three-lobe roots blower series                                                |
|    | <b>污泥处理设备</b><br>Sludge treatment equipment                     | 带式脱水机   厢式压滤机   叠螺式脱水机   污泥干化设备   浅层高效气浮设备<br>Belt filter press   Box filter press   Screw press   Mud scraper   Dissolved air flotation clarifier |
|    | <b>智能化系列</b><br>Intelligent series                              | 智能设备   水务设备健康管理   水务系统工艺优化智联管理<br>Intelligent equipment   Health management for water equipment   Intelligent management for water system process  |
|    | <b>反应器及套装设备</b><br>Reactor and package equipment                | 芬顿反应系统   MBR生物膜反应器   预制泵站   一体化污水处理设备<br>Fenton reaction system   MBR biofilm reactor   Prefabricated pumping station   Intelligent Compact Unit   |
|  | <b>耗材药剂及相关设备</b><br>Consumables, reagents and related equipment | 生物绳   PAC 聚合氯化铝   PAM 聚丙烯酰胺   泡药设备<br>Biological rope   PAC polyaluminum chloride   PAM polyacrylamide   Automatic dispensing dissolvers           |

GSD 的经营理念 Business Philosophy

G-Green 绿色 S-Safe 安全 D-Development 永续经营



川源(中国)机械有限公司  
GSD (China) Co., Ltd.

水处理系统专业合作伙伴

Professional partners in water treatment systems

免费咨询电话

400-657-9066

川源(中国)机械有限公司版权所有 all rights reserved. CY-3C

数据来源: 公司实验室数据及客户实际使用数据, 具体使用环境不同, 数据可能存在差异。本型录内容如有变更, 恕不另行通知。

The data on the brochure is based on the laboratory testing data and customers' actual operation data in the past. The actual data may be different in different application conditions. We reserve the right to change content without notice.

